


1DT052 Computer Networks I

Chapter 1 Introduction

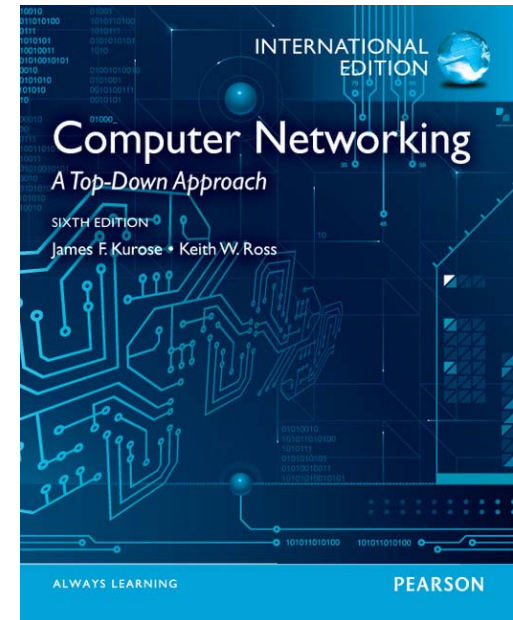

Chapter 1: Overview of the Internet

Our goal:

- ❑ get context, overview, “feel” of networking
- ❑ more depth, detail *later* in course
- ❑ approach:
 - m descriptive
 - m use Internet as example

Overview:

- ❑ what's the Internet
- ❑ what's a protocol?
- ❑ network edge
- ❑ network core
- ❑ access net, physical media
- ❑ Internet/ISP structure
- ❑ performance: loss, delay
- ❑ protocol layers, service models
- ❑ history

Chapter 1: roadmap

1.1 What is the Internet?

1.2 Network edge

1.3 Network core

1.4 Network access and physical media

1.5 Internet structure and ISPs


1.6 Delay & loss in packet-switched networks

1.7 Protocol layers, service models

1.8 History


What's the Internet: "nuts and bolts" view

- millions of connected computing devices: *hosts, end-systems*
 - m PCs workstations, servers
 - m PDAs, mobile phonesrunning *network apps*
- *communication links*
 - m fiber, copper, radio, satellite
 - m transmission rate = *bandwidth*
- *routers*: forward packets (chunks of data)

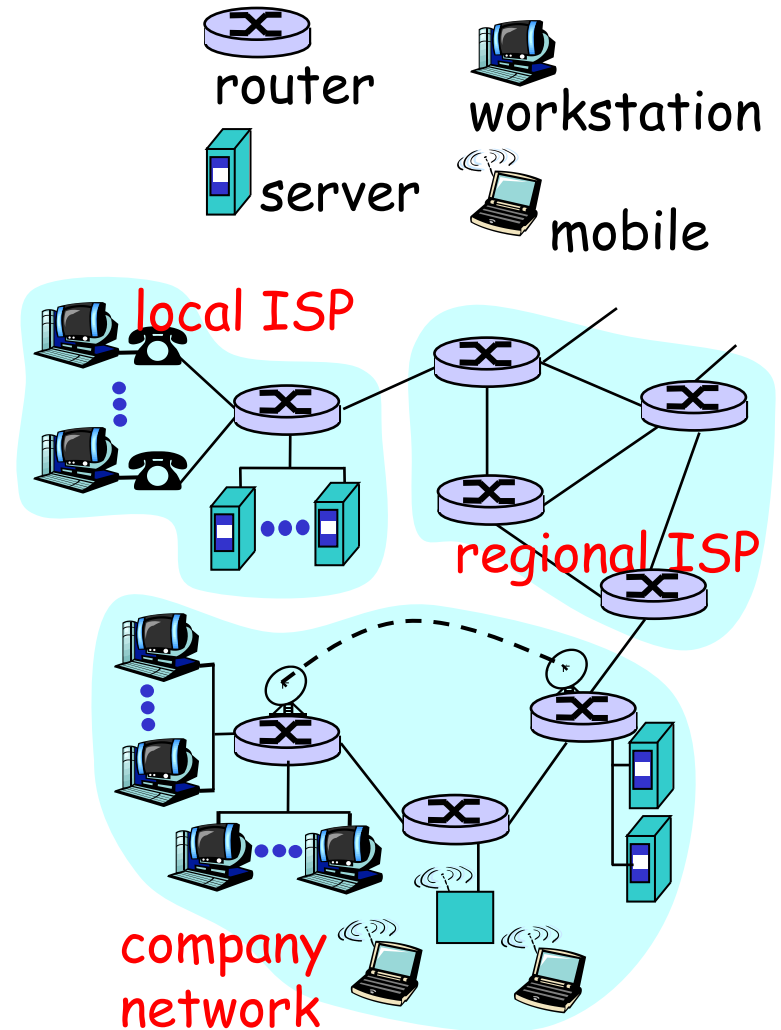


What's the Internet: "nuts and bolts" view

- *protocols* control sending, receiving of msgs
 - m e.g., TCP, IP, HTTP, FTP, PPP
- *Internet: "network of networks"*
 - m loosely hierarchical
 - m public Internet versus private intranet
- Internet standards
 - m RFC: Request for comments
 - m IETF: Internet Engineering Task Force

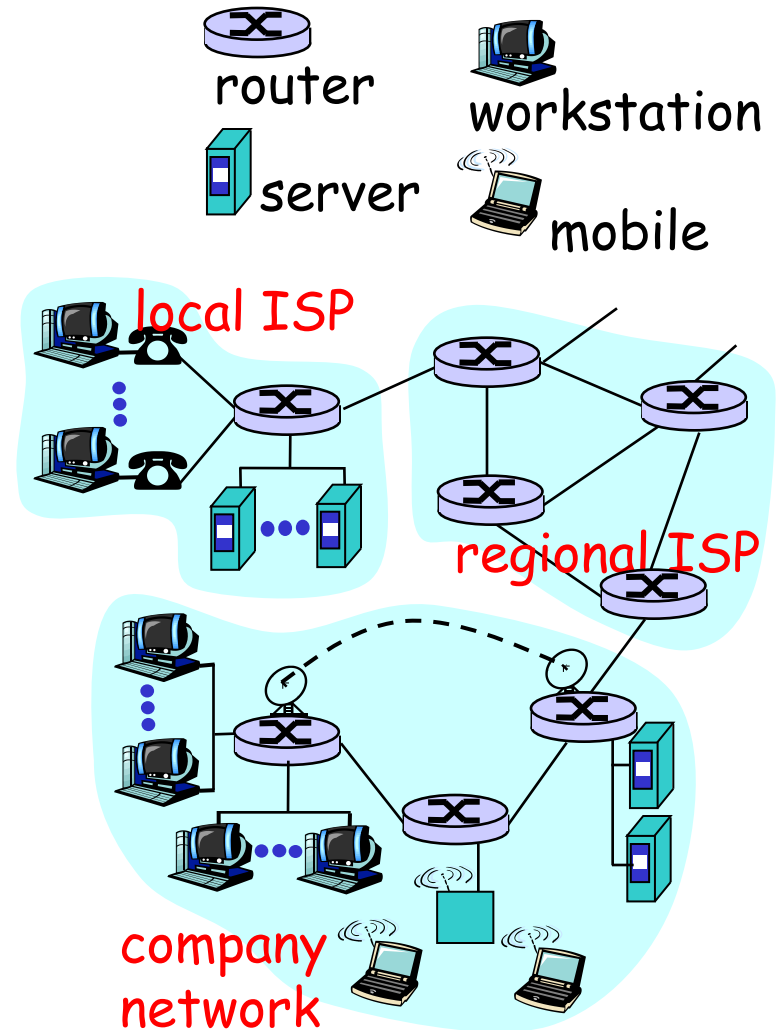


What's the Internet: a service view

- Q: Why do we need a network ?

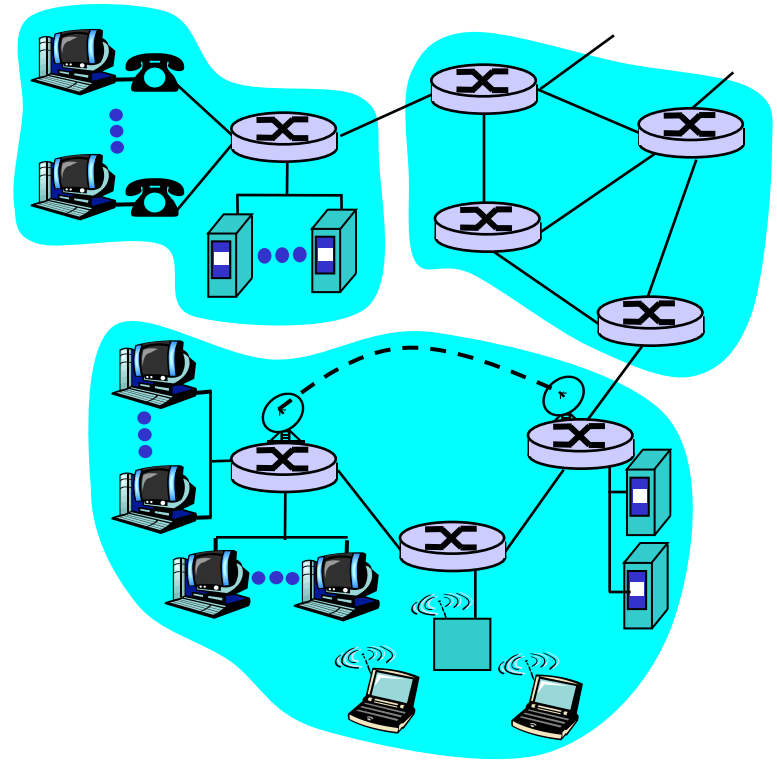

What's the Internet: a service view

- **communication infrastructure** enables distributed applications:
 - m Web, email, games, e-commerce, database., voting, file (MP3) sharing
- **communication services provided to apps:**
 - m connectionless
 - m connection-oriented

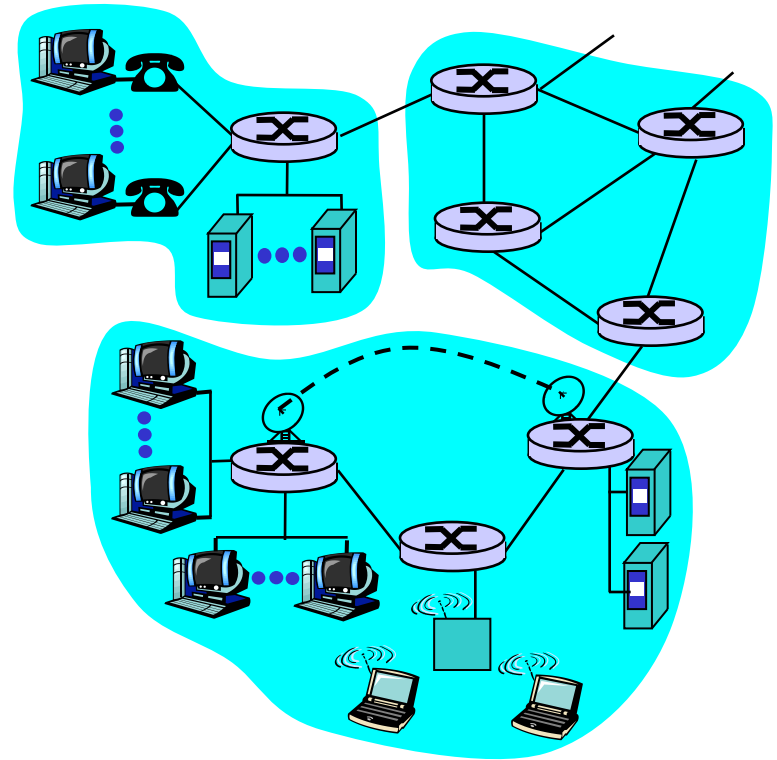

What's a protocol: formal def

human protocols:

- ❑ "what's the time?"
- ❑ "I have a question"
- ❑ introductions

... specific msgs sent

... specific actions taken
when msgs received,
or other events


network protocols:

- ❑ machines rather than humans
- ❑ all communication activity in Internet governed by protocols

*protocols define format,
order of msgs sent and
received among network
entities, and actions
taken on msg
transmission, receipt*

What's a protocol?

a human protocol and a computer network protocol:

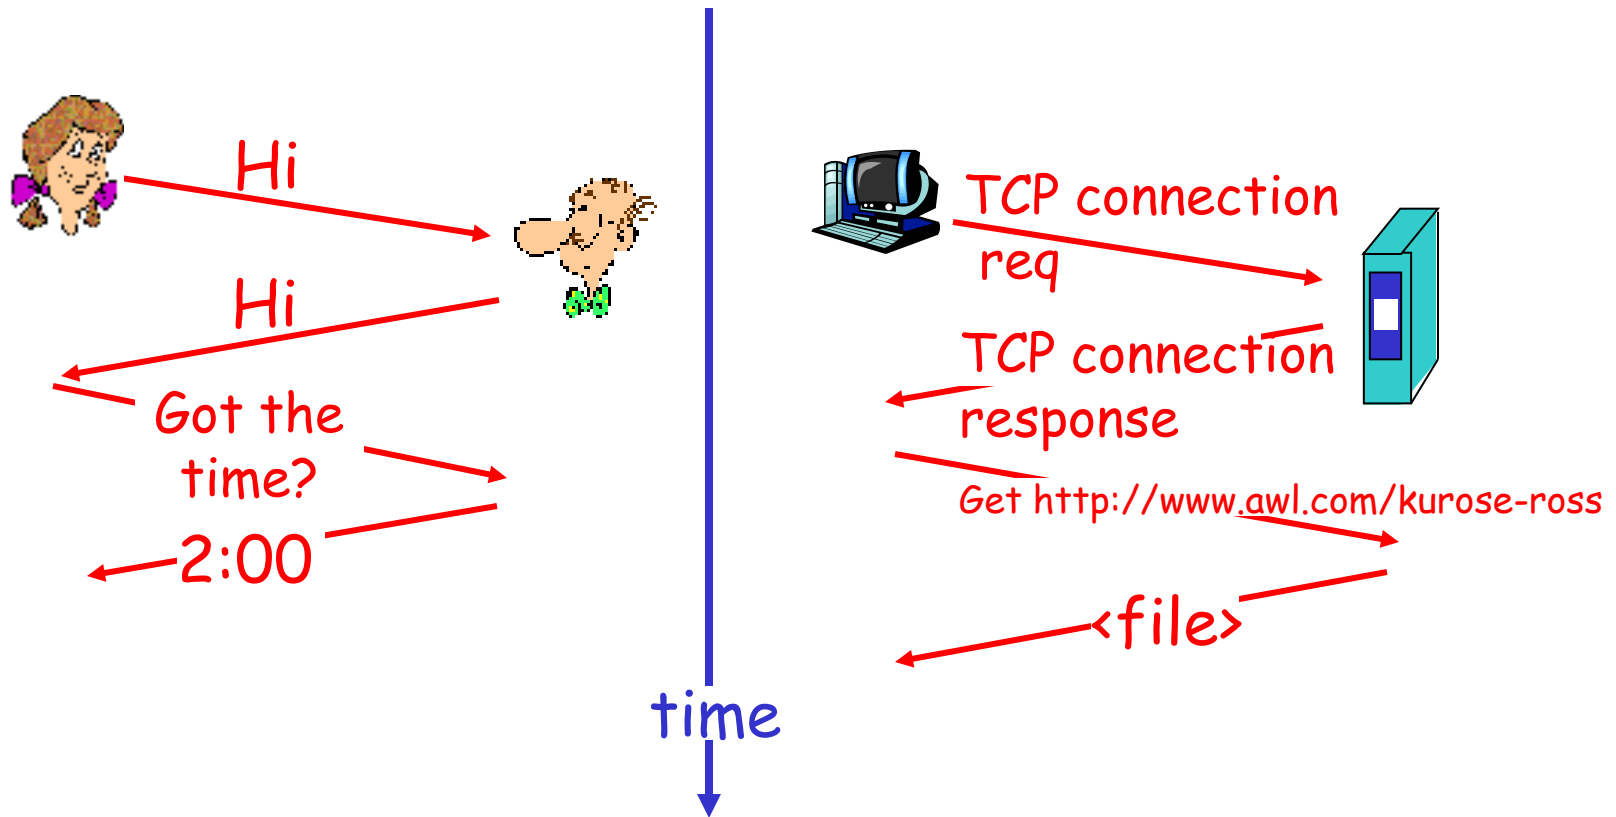

“Cool” internet appliances



Internet Weather Info



Web-enabled toaster+weather forecaster




FordSync + Microsoft's Automotive ?



WiFi Internet Picture Frame

A closer look at network structure:

- **network edge:**
applications and hosts
- **network core:**
 - m routers
 - m network of networks
- **access networks,**
physical media:
communication links

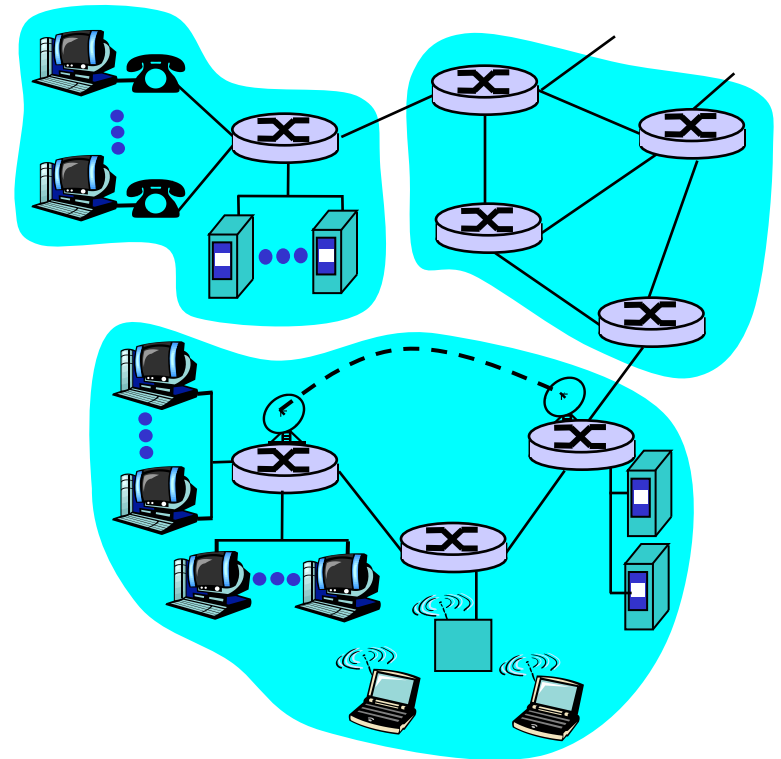

Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

1.3 Network core

1.4 Network access and physical media

1.5 Internet structure and ISPs


1.6 Delay & loss in packet-switched networks

1.7 Protocol layers, service models

1.8 History

A closer look at network structure:

- **network edge:**
applications and hosts
- **network core:**
 - m routers
 - m network of networks
- **access networks,**
physical media:
communication links

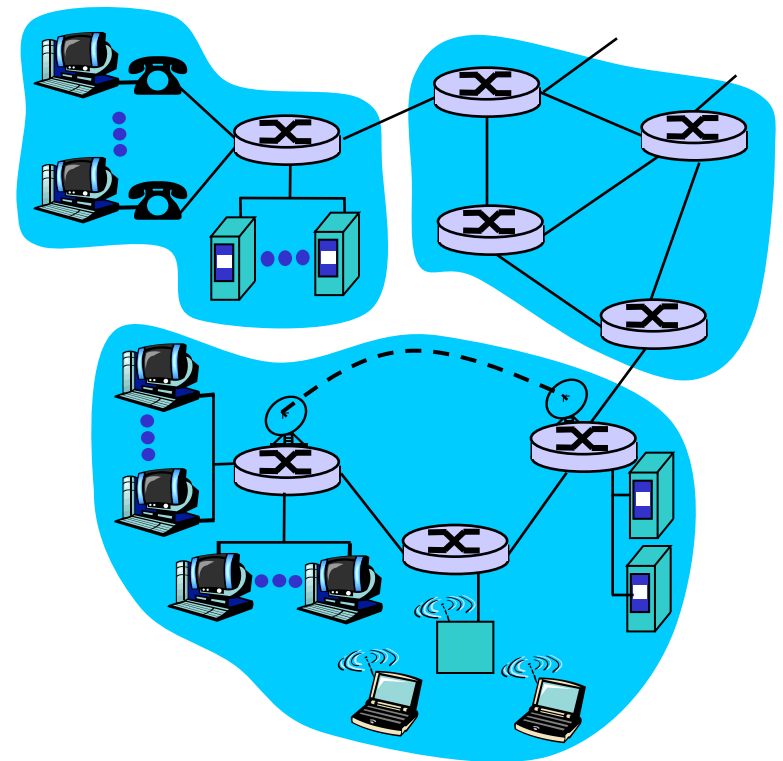

The network edge:

□ end systems (hosts):


- m run application programs
- m e.g. Web, email
- m at "edge of network"

□ client/server model

- m client host requests, receives service from always-on server
- m e.g. Web browser/server; FTP client/server

□ peer-peer model:

- m minimal (or no) use of dedicated servers
- m e.g. Skype, BitTorrent, eMule

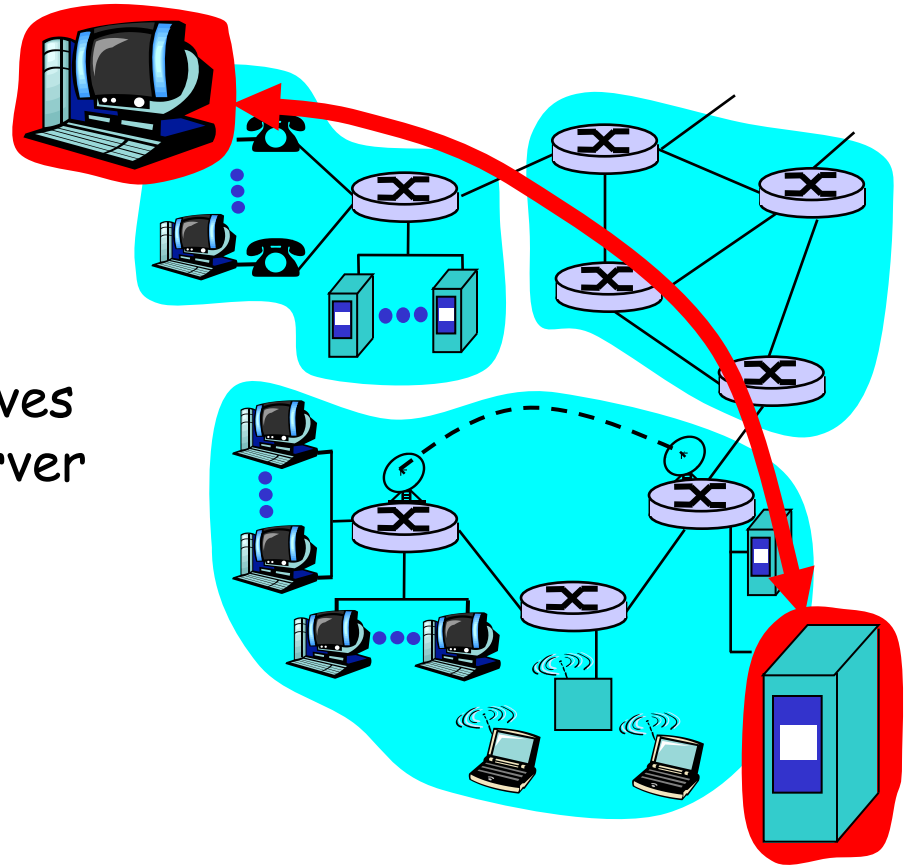

The network edge:


❑ Q: Which is better ?

❑ client/server model

- m client host requests, receives service from always-on server
- m e.g. Web browser/server; FTP client/server

❑ peer-peer model:

- m minimal (or no) use of dedicated servers
- m e.g. Skype, BitTorrent, eMule

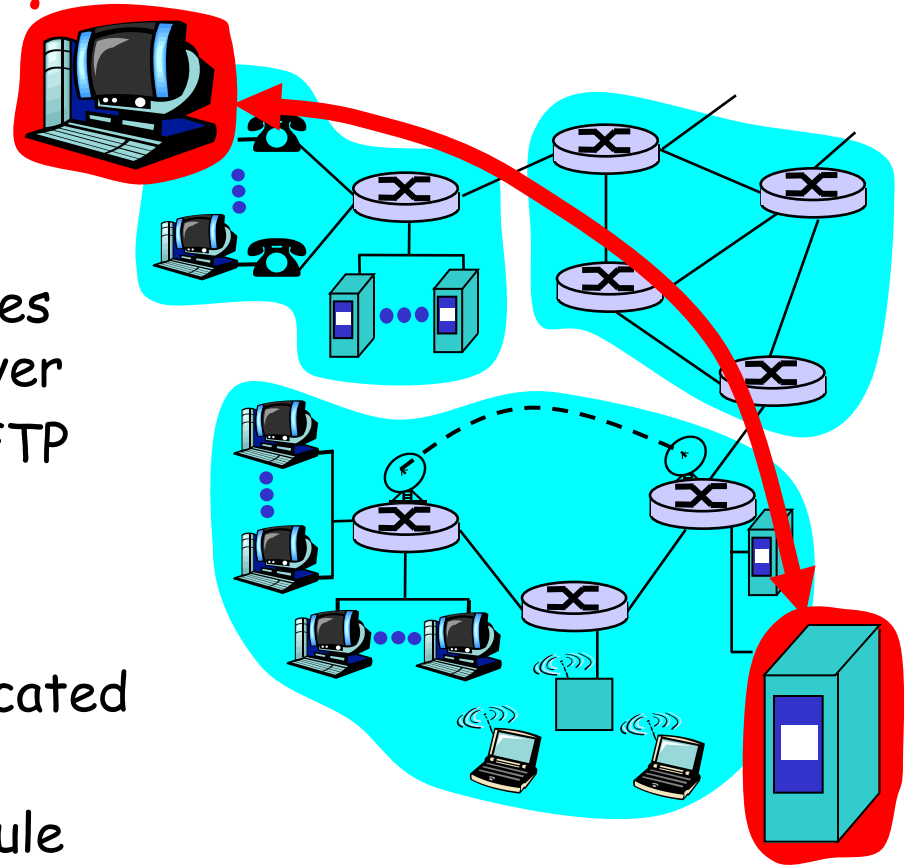

Network edge: connection-oriented service

- Goal: data transfer between end systems
- *handshaking*: setup (prepare for) data transfer ahead of time
 - m Hello, hello back human protocol
 - m *set up "state"* in two communicating hosts
- TCP - Transmission Control Protocol
 - m Internet's connection-oriented service

TCP service [RFC 793]

- *reliable, in-order* byte-stream data transfer
 - m loss: acknowledgements and retransmissions
- *flow control*:
 - m sender won't overwhelm receiver
- *congestion control*:
 - m senders "slow down sending rate" when network congested

Network edge: connectionless service

Goal: data transfer
between end systems
m same as before!

- **UDP** - User Datagram Protocol [RFC 768]:
Internet's
connectionless service
 - m unreliable data transfer
 - m no flow control
 - m no congestion control

Connection vs connectionless

Q: why implement both TCP and UDP

App's using TCP:

- ❑ HTTP (Web), FTP (file transfer), Telnet (remote login), SMTP (email)

App's using UDP:

- ❑ streaming media, teleconferencing, DNS, Internet telephony

Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

1.3 Network core

1.4 Network access and physical media

1.5 Internet structure and ISPs


1.6 Delay & loss in packet-switched networks

1.7 Protocol layers, service models

1.8 History

The Network Core


- mesh of interconnected routers
- the fundamental question: how is data transferred through net?
 - m circuit switching: dedicated circuit per call: telephone net
 - m packet-switching: data sent thru net in discrete "chunks"

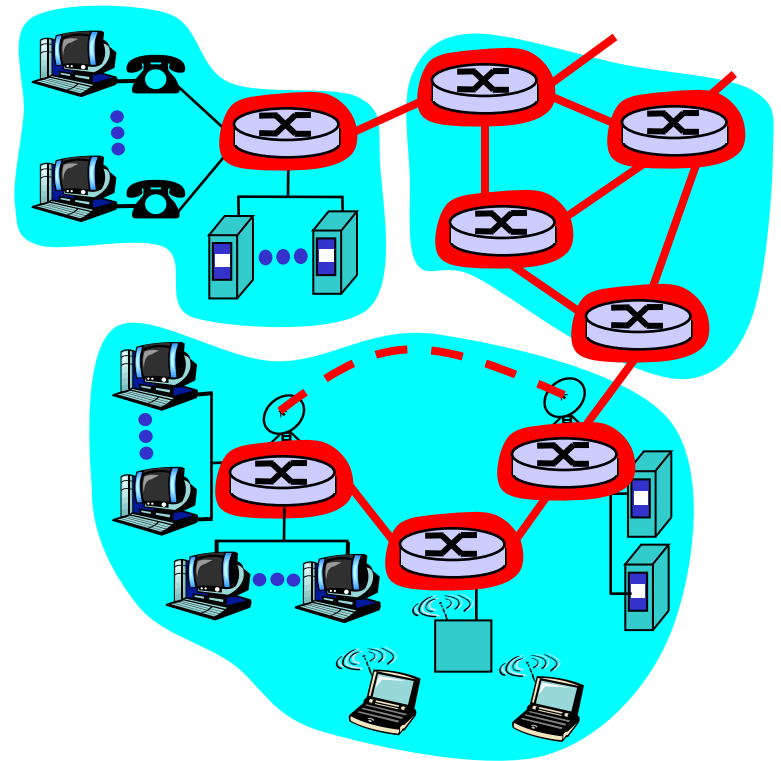

Network Core: Circuit Switching

End-end resources reserved for "call"

- ❑ link bandwidth, switch capacity
- ❑ dedicated resources: no sharing
- ❑ circuit-like (guaranteed) performance
- ❑ call setup required

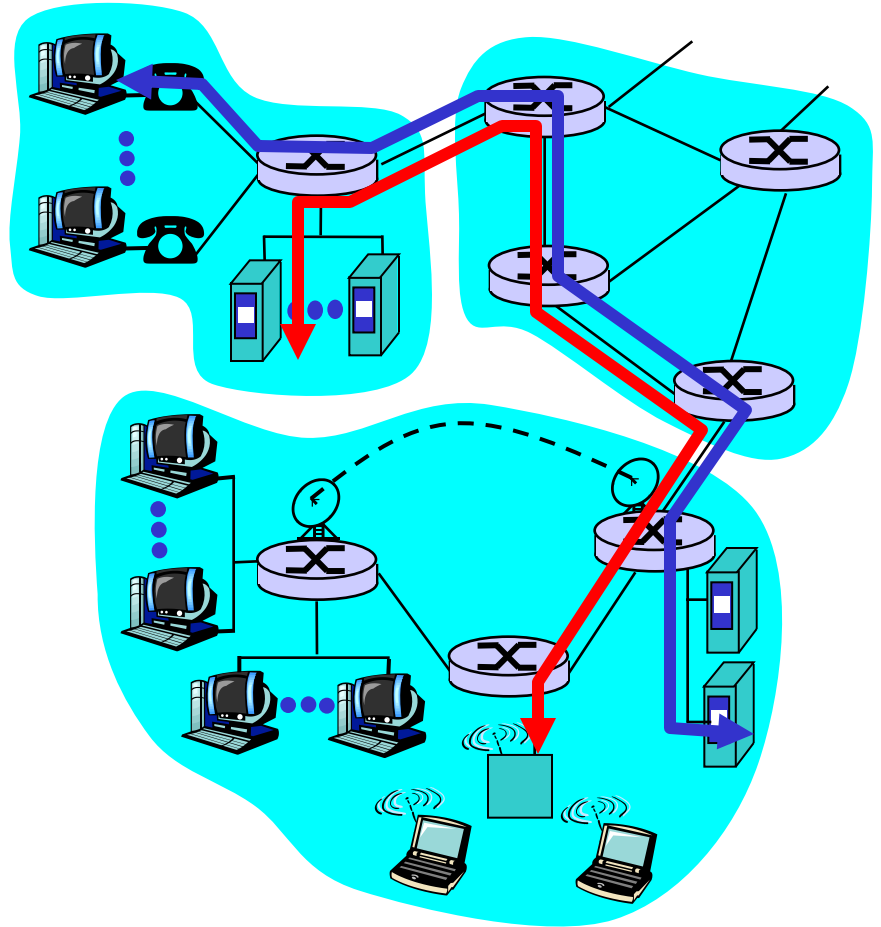

Network Core: Circuit Switching

network resources
(e.g., bandwidth)

divided into "pieces"

- pieces allocated to calls
- resource piece *idle* if not used by owning call (*no sharing*)

□ dividing link bandwidth into "pieces"

m frequency division


m time division

Circuit Switching: FDMA and TDMA


FDMA

Example:

4 users

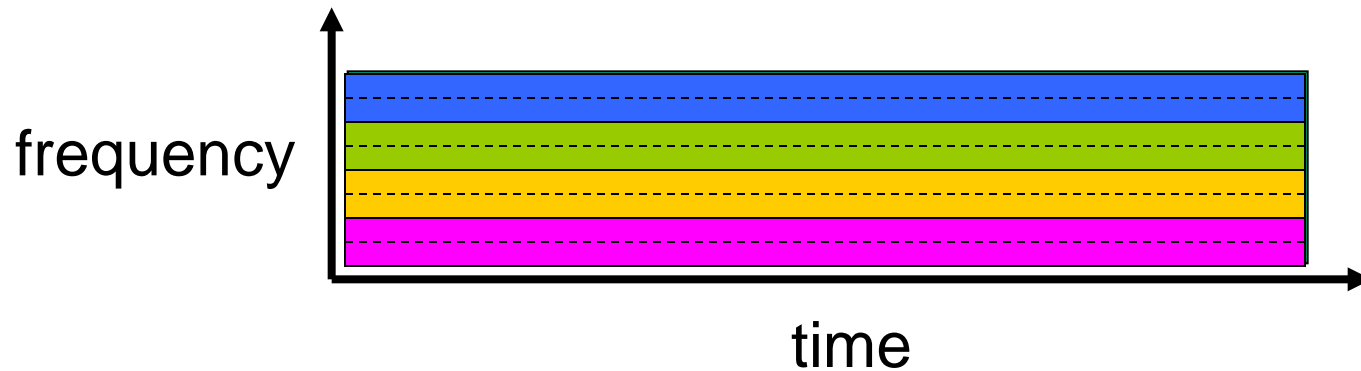

TDMA

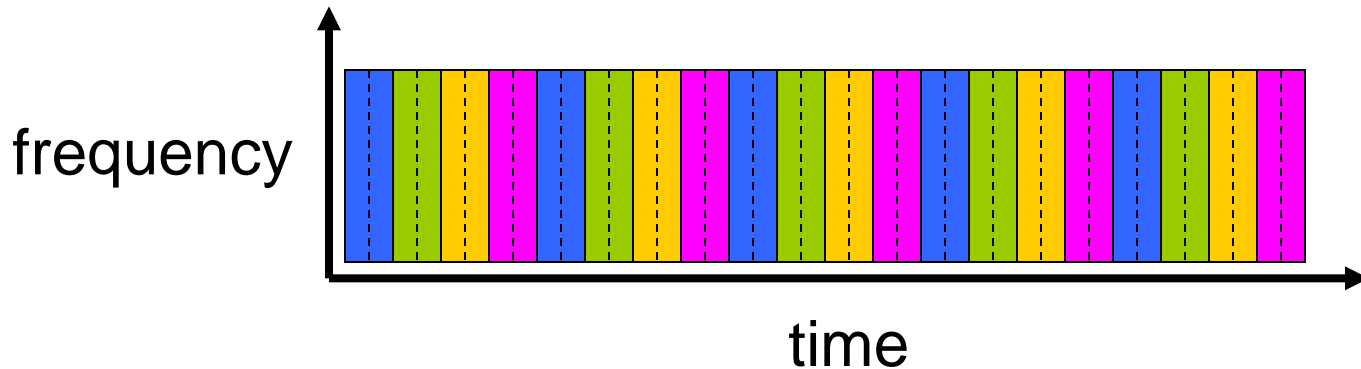

Numerical example

- How long does it take to send a file of 640,000 bits from host A to host B over a circuit-switched network?
 - m All links are 1.536 Mbps
 - m Each link uses TDM with 24 slots/sec
 - m 500 msec to establish end-to-end circuit

Let's work it out!

Network Core: Packet Switching


each end-end data stream
divided into *packets*

- ❑ user A, B packets *share* network resources
- ❑ each packet uses full link bandwidth
- ❑ resources used *as needed*


resource contention:

- ❑ aggregate resource demand can exceed amount available
- ❑ congestion: packets queue, wait for link use
- ❑ store and forward: packets move one hop at a time
 - m Node receives complete packet before forwarding

Bandwidth division into "pieces"
Dedicated allocation
Resource reservation



Packet Switching: Statistical Multiplexing

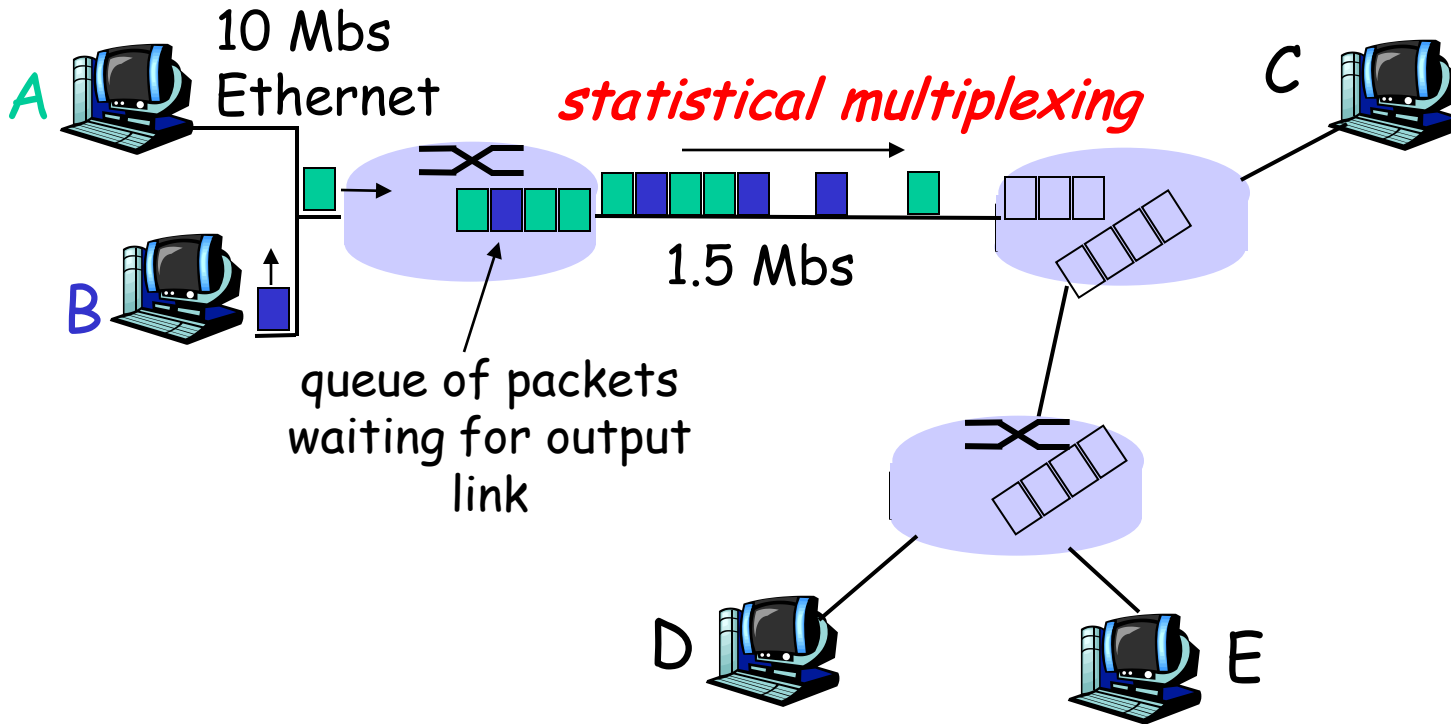

Sequence of A & B packets does not have fixed pattern, shared on demand → *statistical multiplexing*.

TDM: each host gets same slot in revolving TDM frame.

Packet switching versus circuit switching

Packet switching allows more users to use network!


- 1 Mbit link
- each user:
 - m 100 kbps when "active"
 - m active 10% of time

- circuit-switching:

 - m 10 users

- packet switching:

 - m with 35 users,
probability > 10 active
less than .0004

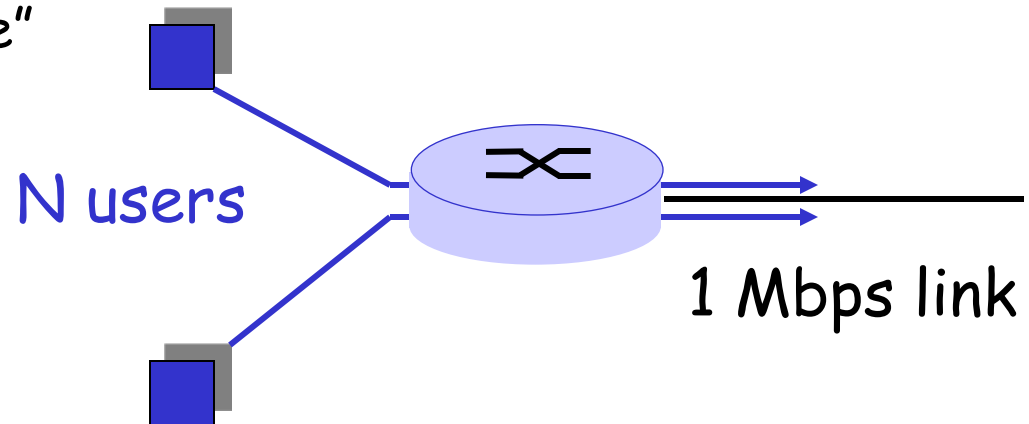


Q: how did we get value 0.0004?

Packet switching versus circuit switching

Is packet switching a "slam dunk winner?"


- ❑ Great for bursty data
 - m resource sharing
 - m simpler, no call setup
- ❑ **Excessive congestion:** packet delay and loss
 - m protocols needed for reliable data transfer, congestion control
- ❑ **Q: How to provide circuit-like behavior?**
 - m bandwidth guarantees needed for audio/video apps
 - m still an unsolved problem (chapter 6)

Network Taxonomy

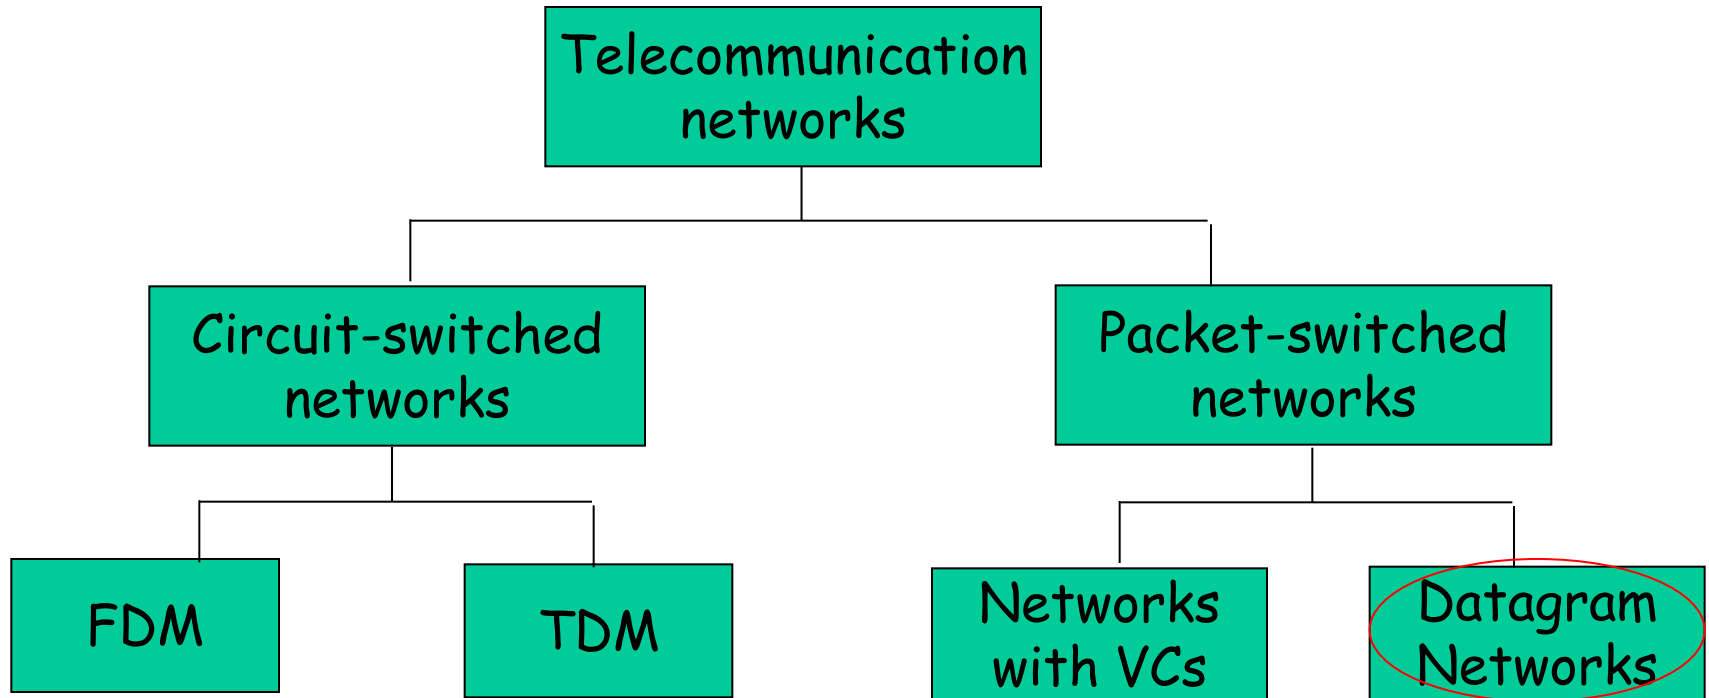

- Datagram network is not either connection-oriented or connectionless.
- Internet provides both connection-oriented (TCP) and connectionless services (UDP) to apps.

Network Taxonomy, cont'd

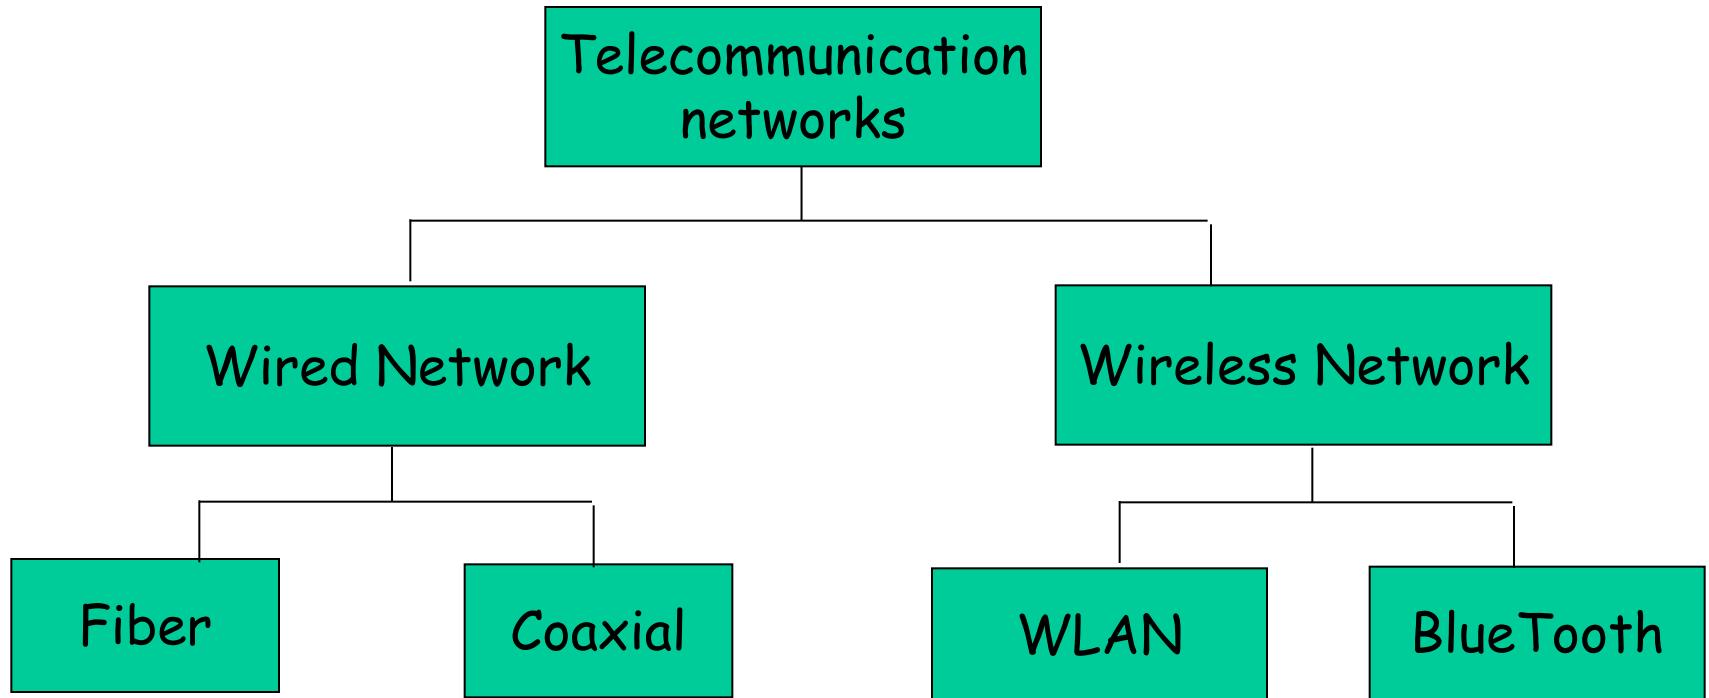

- There are many other taxonomies ...

Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

1.3 Network core

1.4 Network access and physical media

1.5 Internet structure and ISPs

1.6 Delay & loss in packet-switched networks

1.7 Protocol layers, service models

1.8 History


Access networks and physical media

Q: How to connect end systems to edge router?

- ❑ residential access nets
- ❑ institutional access networks (school, company)
- ❑ mobile access networks

Keep in mind:


- ❑ bandwidth (bits per second) of access network?
- ❑ shared or dedicated?
(10M > 6M ?)

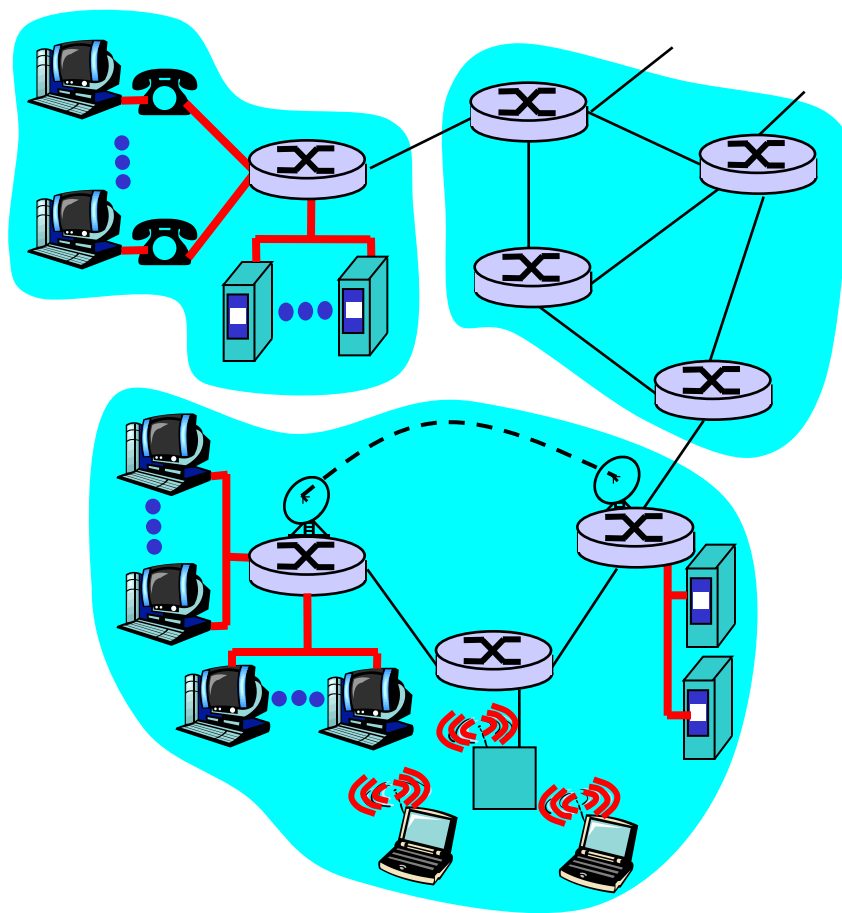

Residential access: point to point access

□ Dialup via modem

- m up to 56Kbps direct access to router (often less)
- m Can't surf and phone at same time: can't be "always on"

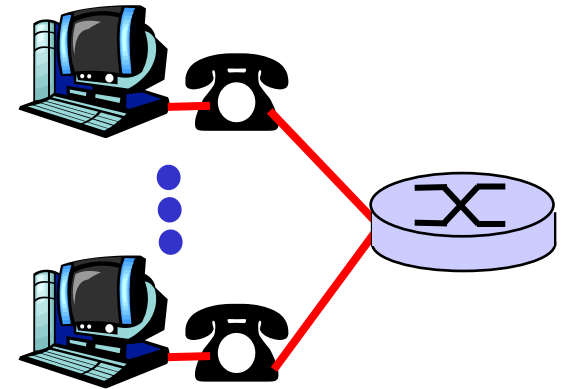


□ ADSL: asymmetric digital subscriber line

- m E.g. Telus
- m up to 1 Mbps upstream (today typically < 256 kbps)
- m up to 8 Mbps downstream (today typically < 1 Mbps)
- m FDM: 50 kHz - 1 MHz for downstream
4 kHz - 50 kHz for upstream
0 kHz - 4 kHz for ordinary telephone

Residential access: cable modems


- ❑ **HFC: hybrid fiber coax**
 - m asymmetric: up to 10Mbps upstream, 1 Mbps downstream
- ❑ **network** of cable and fiber attaches homes to ISP router
 - m shared access to router among home
 - m issues: congestion, dimensioning
- ❑ deployment: available via cable companies

Residential access: cable modems

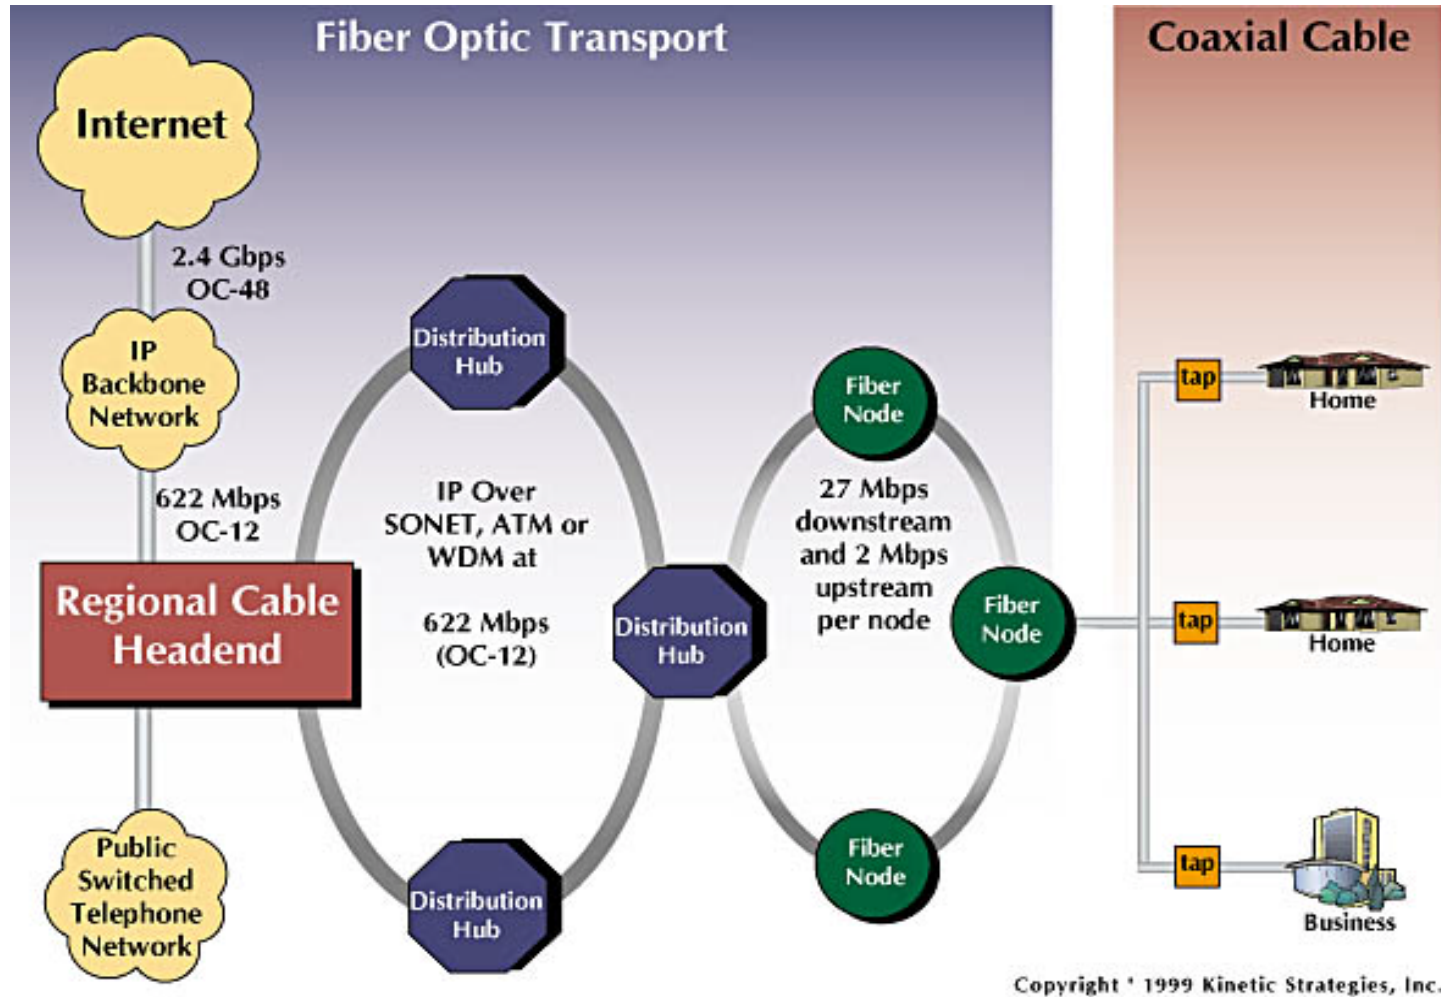


Cable Network Architecture: Overview


Typically 500 to 5,000 homes

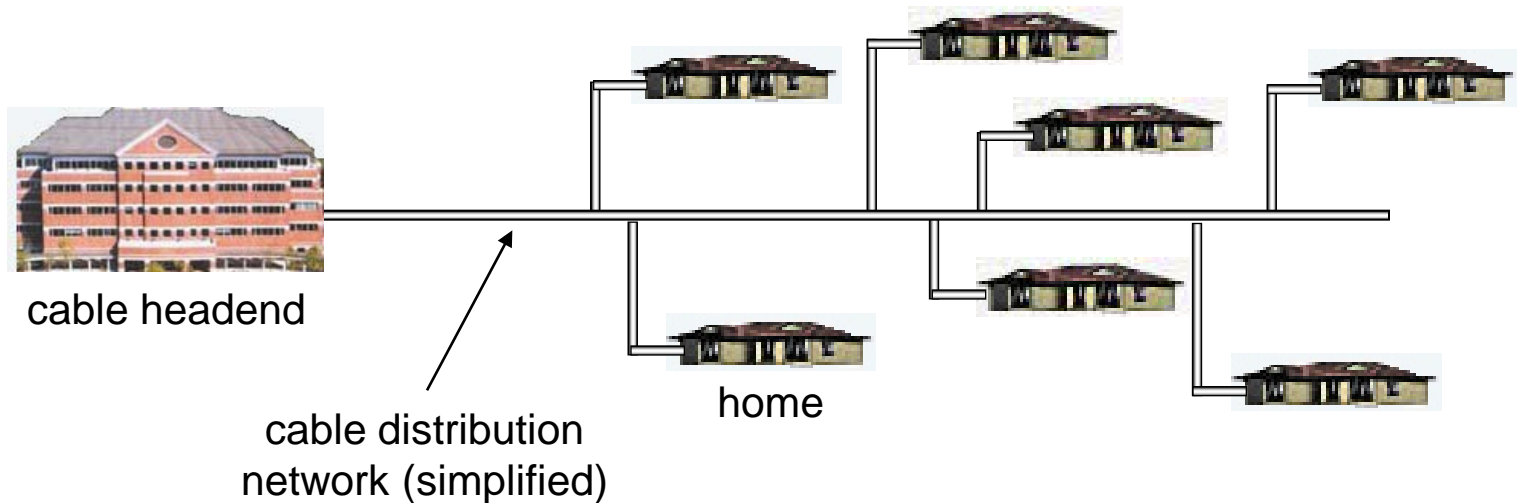


Cable Network Architecture: Overview

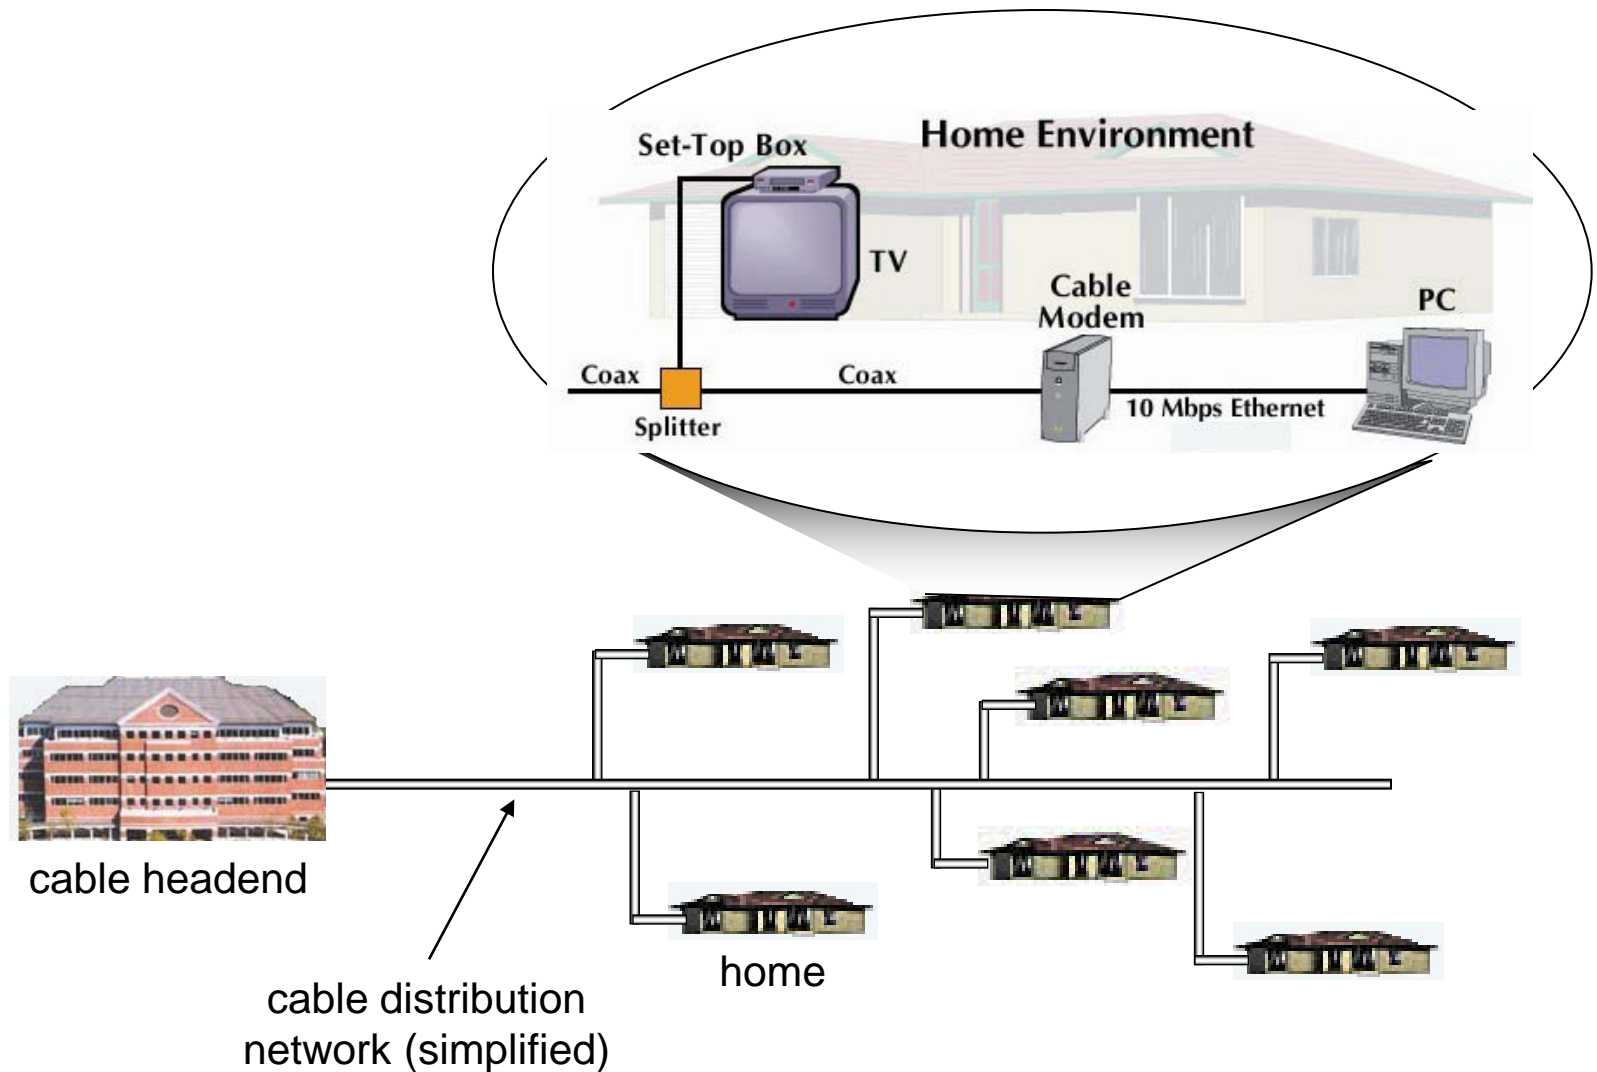

Cable Network Architecture: Overview

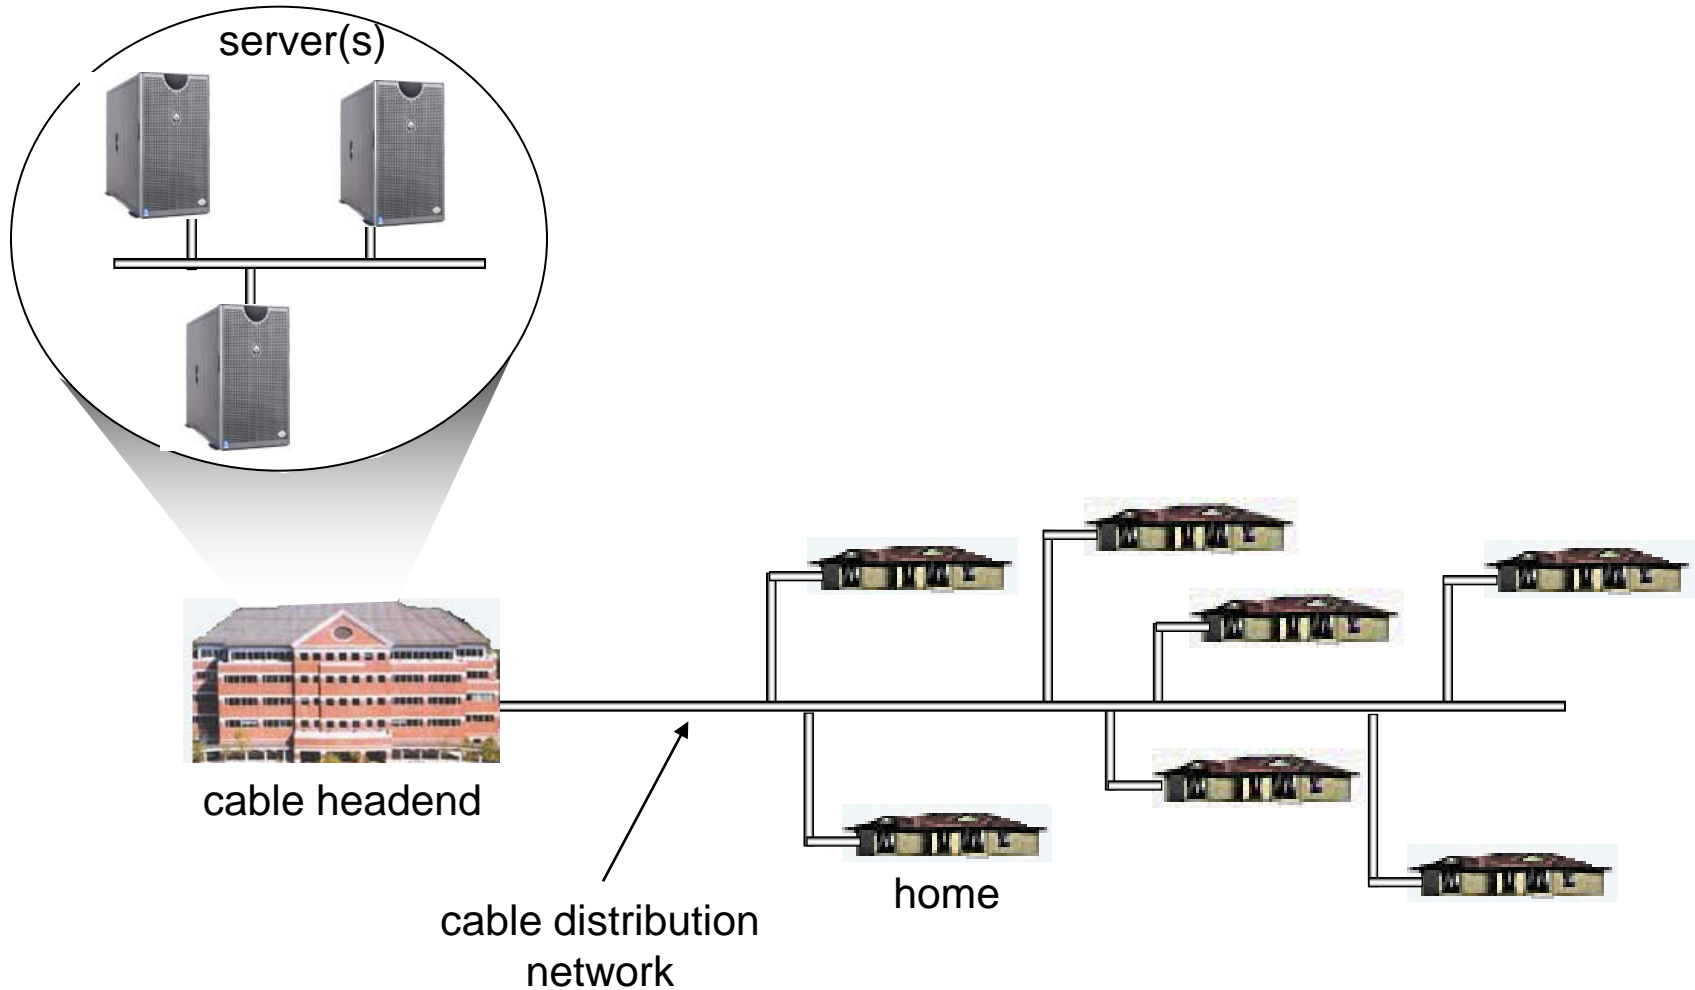


Cable Network Architecture: Overview

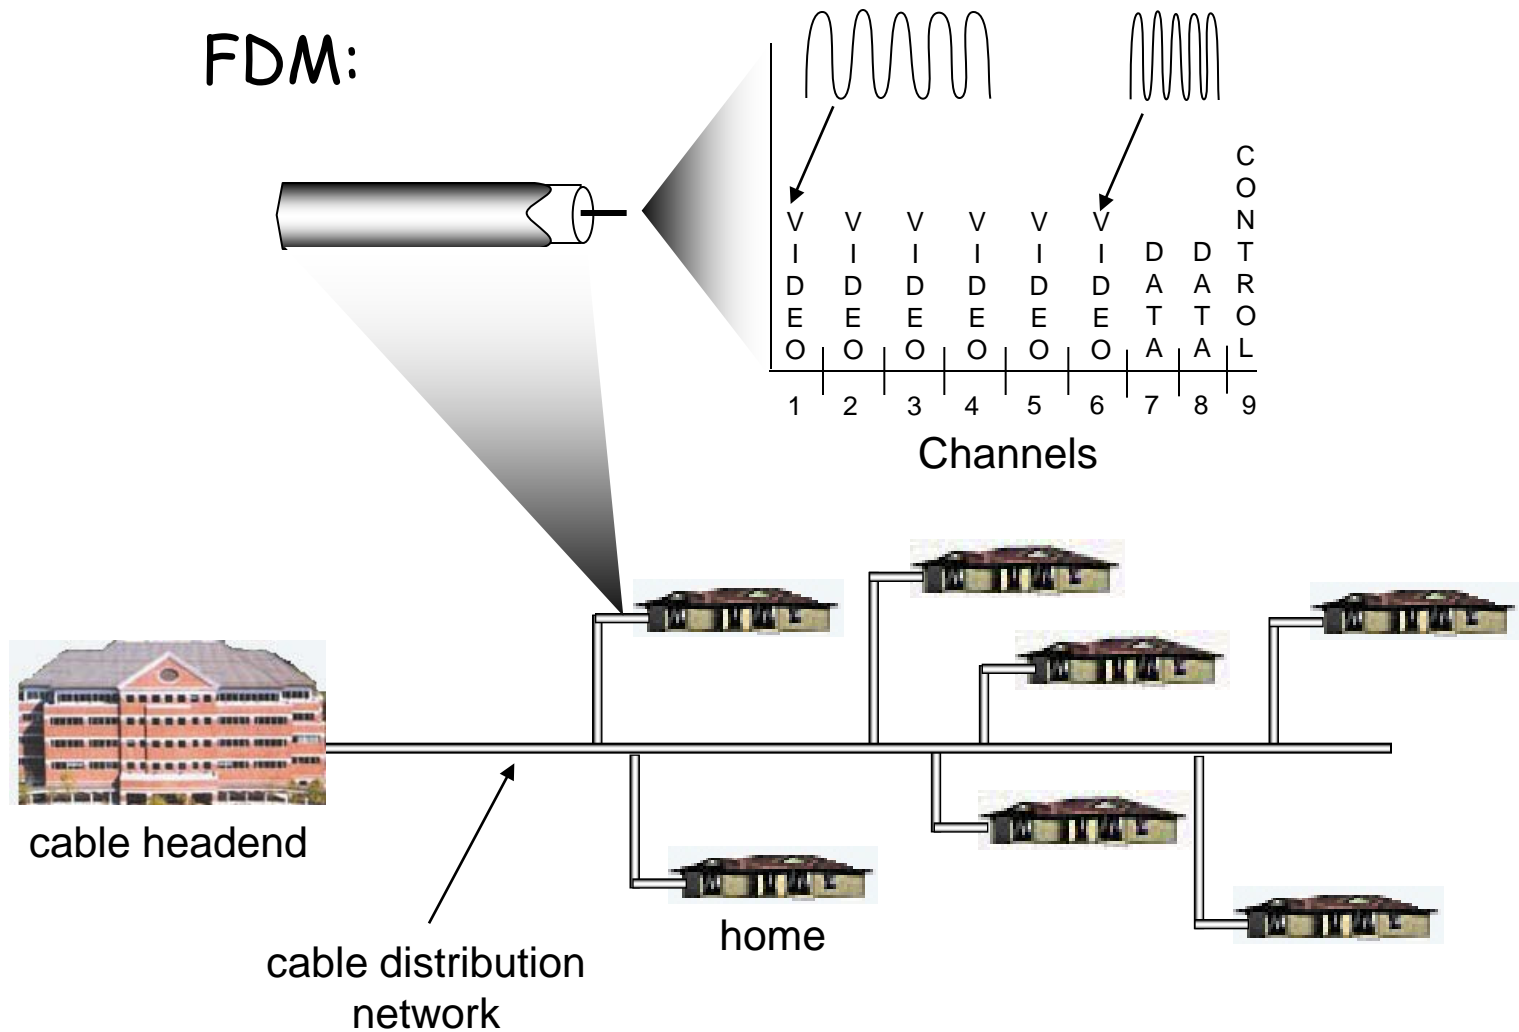


Company access: local area networks

- ❑ company/univ **local area network** (LAN) connects end system to edge router
- ❑ **Ethernet:**
 - m shared or dedicated link connects end system and router
 - m 10 Mbs, 100Mbps, Gigabit Ethernet
- ❑ **deployment:** institutions, home LANs happening now
- ❑ LANs: chapter 5

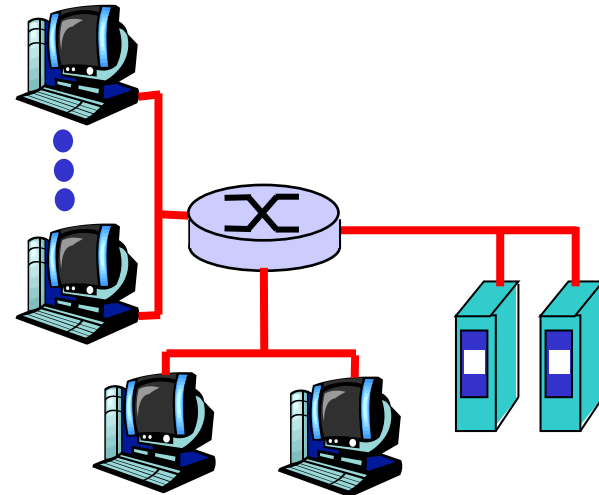

Wireless access networks


- shared *wireless* access network connects end system to router
 - m via base station aka "access point"
- **wireless LANs:**
 - m 802.11b (WiFi): 11 Mbps
- **wider-area wireless access**
 - m provided by telco operator
 - m 3G
 - m GPRS

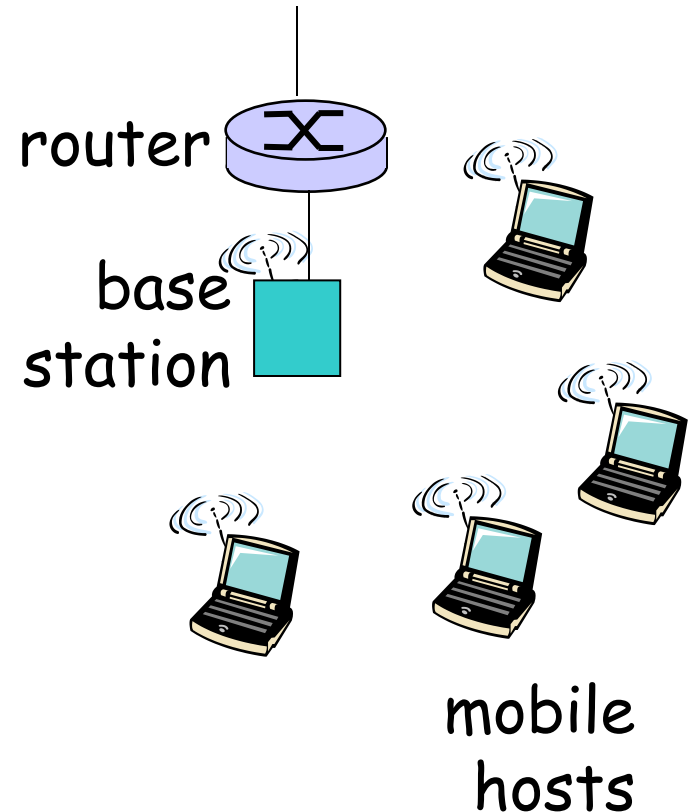

Home networks

Typical home network components:

- ❑ ADSL or cable modem
- ❑ router/firewall
- ❑ Ethernet
- ❑ wireless access point

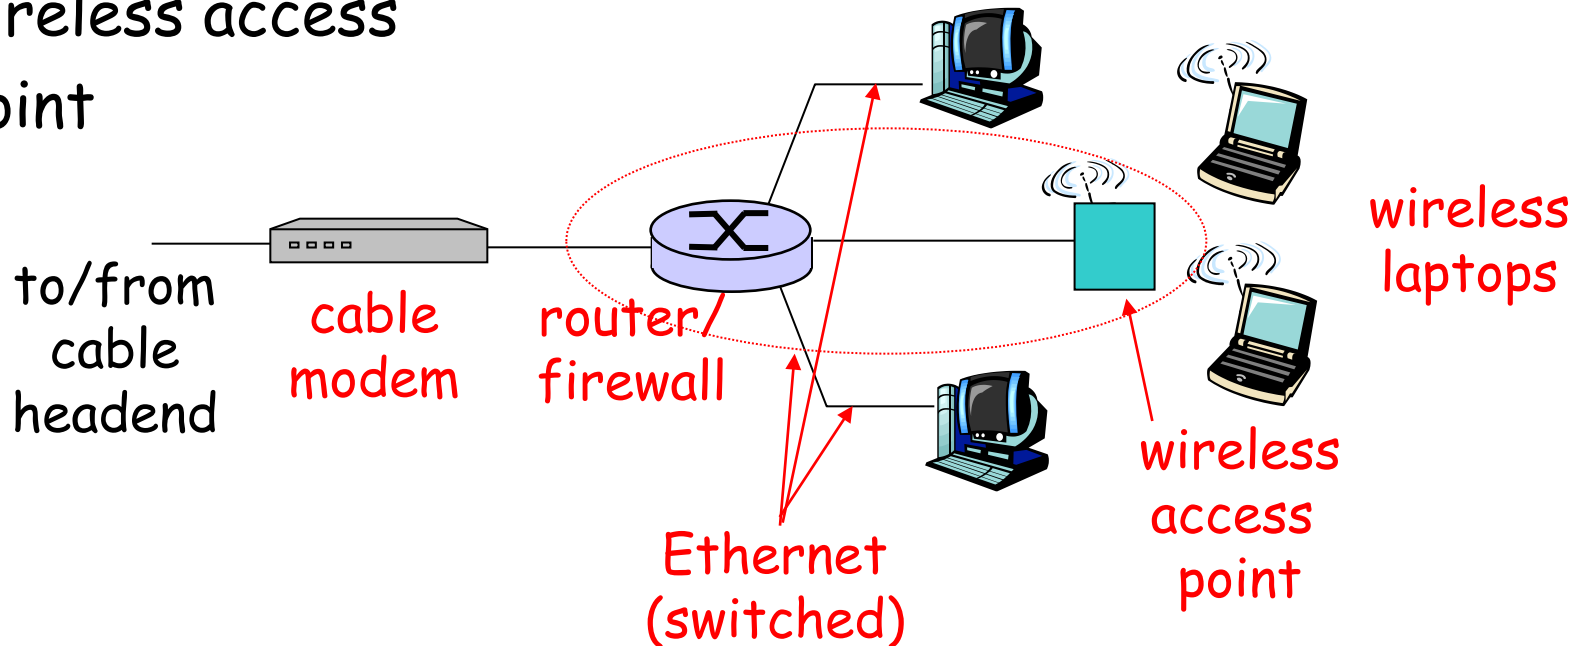

Physical Media

- ❑ **Bit:** propagates between transmitter/rcvr pairs
- ❑ **physical link:** what lies between transmitter & receiver
- ❑ **guided media:**
 - m signals propagate in solid media: copper, fiber, coax
- ❑ **unguided media:**
 - m signals propagate freely, e.g., radio
 - m Problem ?

Twisted Pair (TP)


- ❑ two insulated copper wires
 - m Category 3: traditional phone wires, 10 Mbps Ethernet
 - m Category 5 TP: 100Mbps Ethernet



Physical Media: coax

Coaxial cable:

- ❑ two concentric copper conductors
- ❑ bidirectional
- ❑ baseband:
 - m single channel on cable
 - m legacy Ethernet
- ❑ broadband:
 - m multiple channel on cable
 - m HFC



Physical Media: coax, fiber

Fiber optic cable:

- ❑ glass fiber carrying light pulses, each pulse a bit
- ❑ high-speed operation:
 - m high-speed point-to-point transmission (e.g., 5 Gps)
- ❑ low error rate: repeaters spaced far apart ; immune to electromagnetic noise



Physical media: radio

- ❑ signal carried in electromagnetic spectrum
- ❑ no physical "wire"
- ❑ bidirectional
- ❑ propagation environment effects:
 - m reflection
 - m obstruction by objects
 - m interference

Radio link types:

- ❑ **terrestrial microwave**
 - m e.g. up to 45 Mbps channels
- ❑ **LAN** (e.g., WaveLAN)
 - m 2Mbps, 11Mbps
- ❑ **wide-area** (e.g., cellular)
 - m e.g. 3G: hundreds of kbps
- ❑ **satellite**
 - m up to 50Mbps channel (or multiple smaller channels)
 - m 270 msec end-end delay
 - m geosynchronous versus LEOS

Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

1.3 Network core

1.4 Network access and physical media

1.5 Internet structure and ISPs


1.6 Delay & loss in packet-switched networks

1.7 Protocol layers, service models

1.8 History

Internet structure: network of networks

- roughly hierarchical
- **at center: "tier-1" ISPs** (e.g., UUNet, BBN/Genuity, Sprint, AT&T), national/international coverage
 - m treat each other as equals

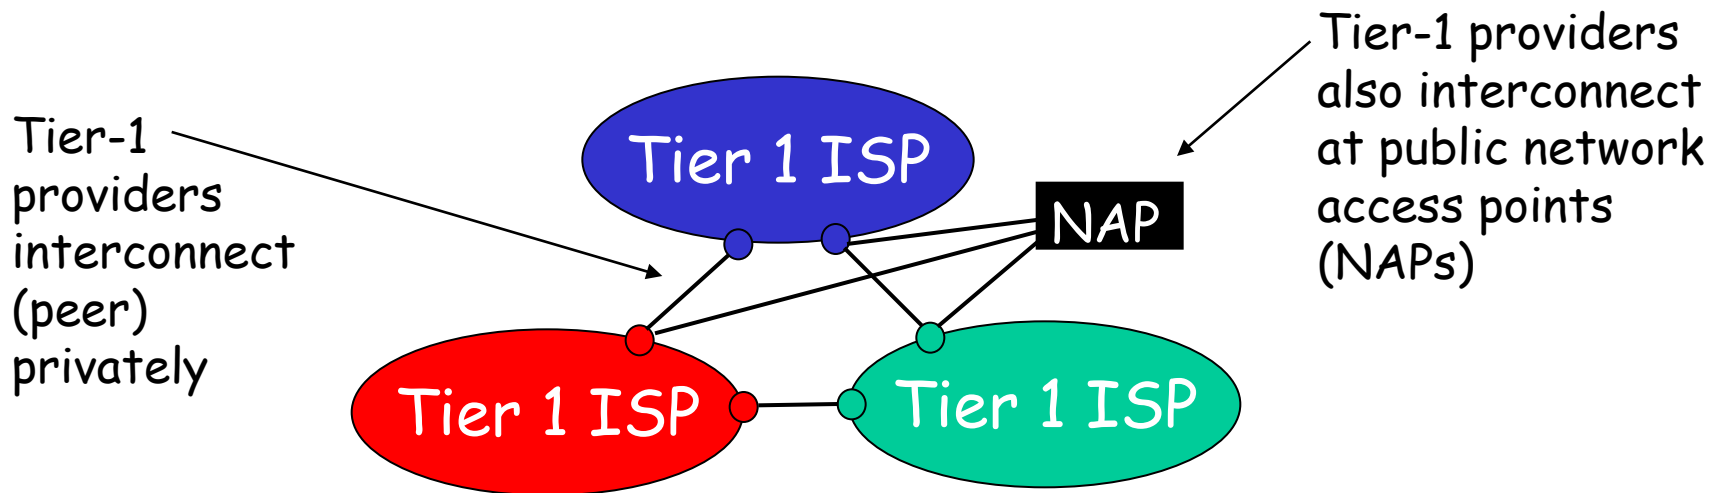


Internet structure: network of networks

- “Tier-2” ISPs: smaller (often regional) ISPs
 - m Connect to one or more tier-1 ISPs, possibly other tier-2 ISPs

Tier-2 ISP pays tier-1 ISP for connectivity to rest of Internet


- tier-2 ISP is customer of tier-1 provider

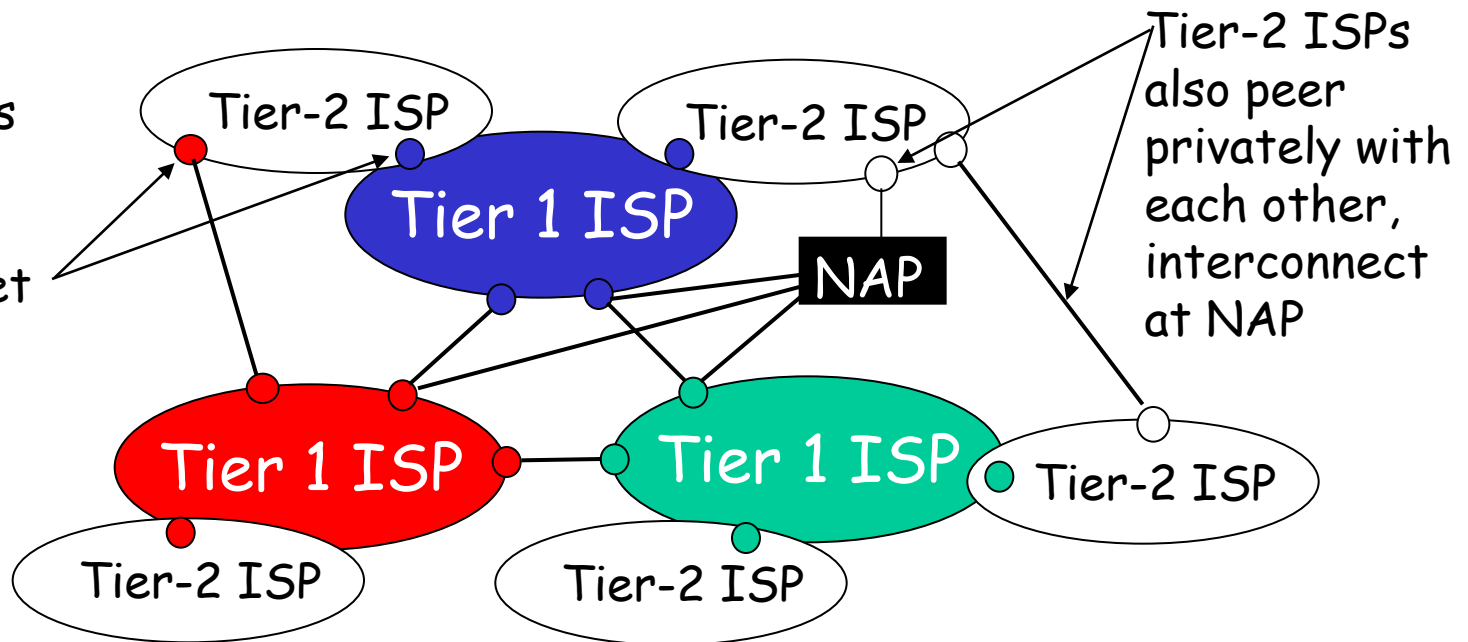

Internet structure: network of networks


□ “Tier-3” ISPs and local ISPs

m last hop (“access”) network (closest to end systems)

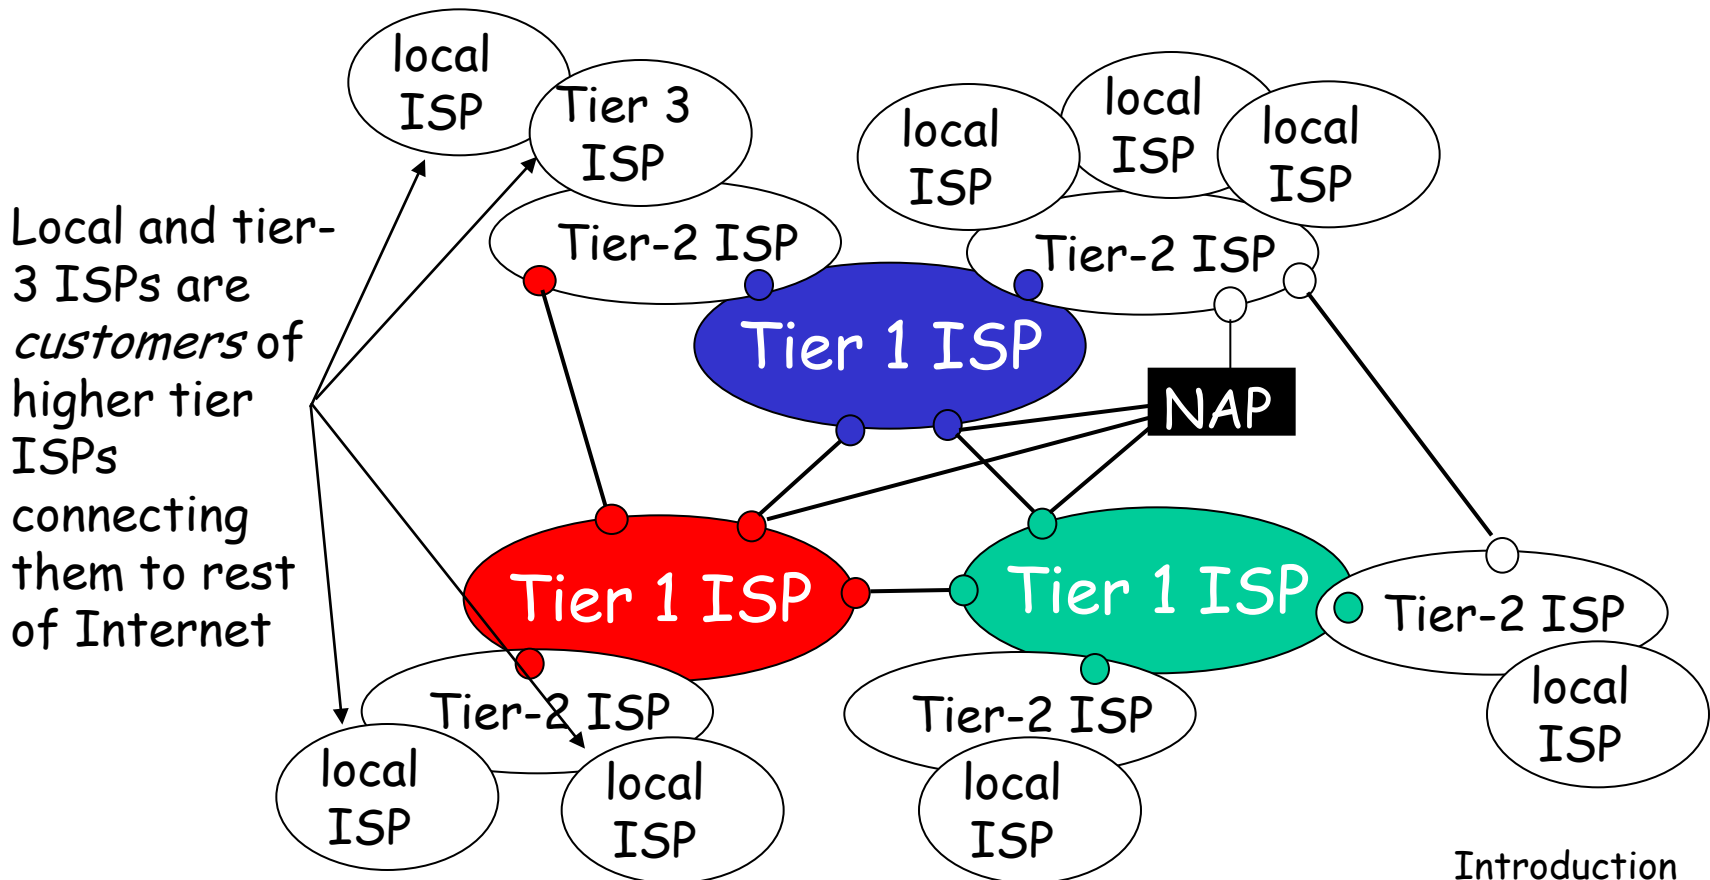


Internet structure: network of networks

- a packet passes through many networks!

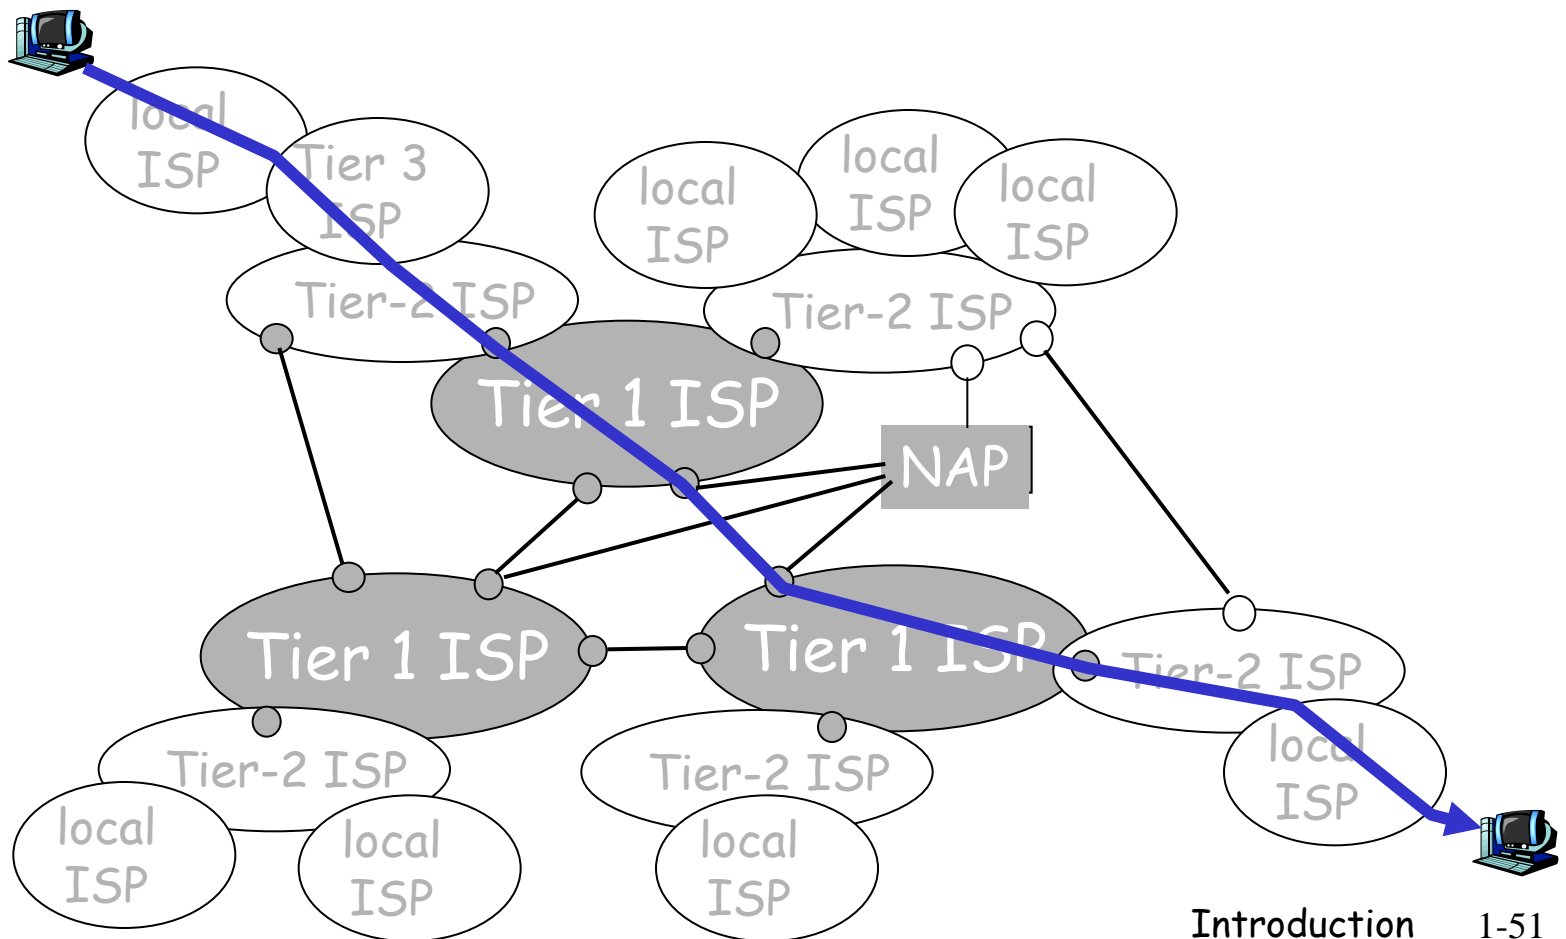

Internet structure: network of networks

□ Q: Why hierarchical ?

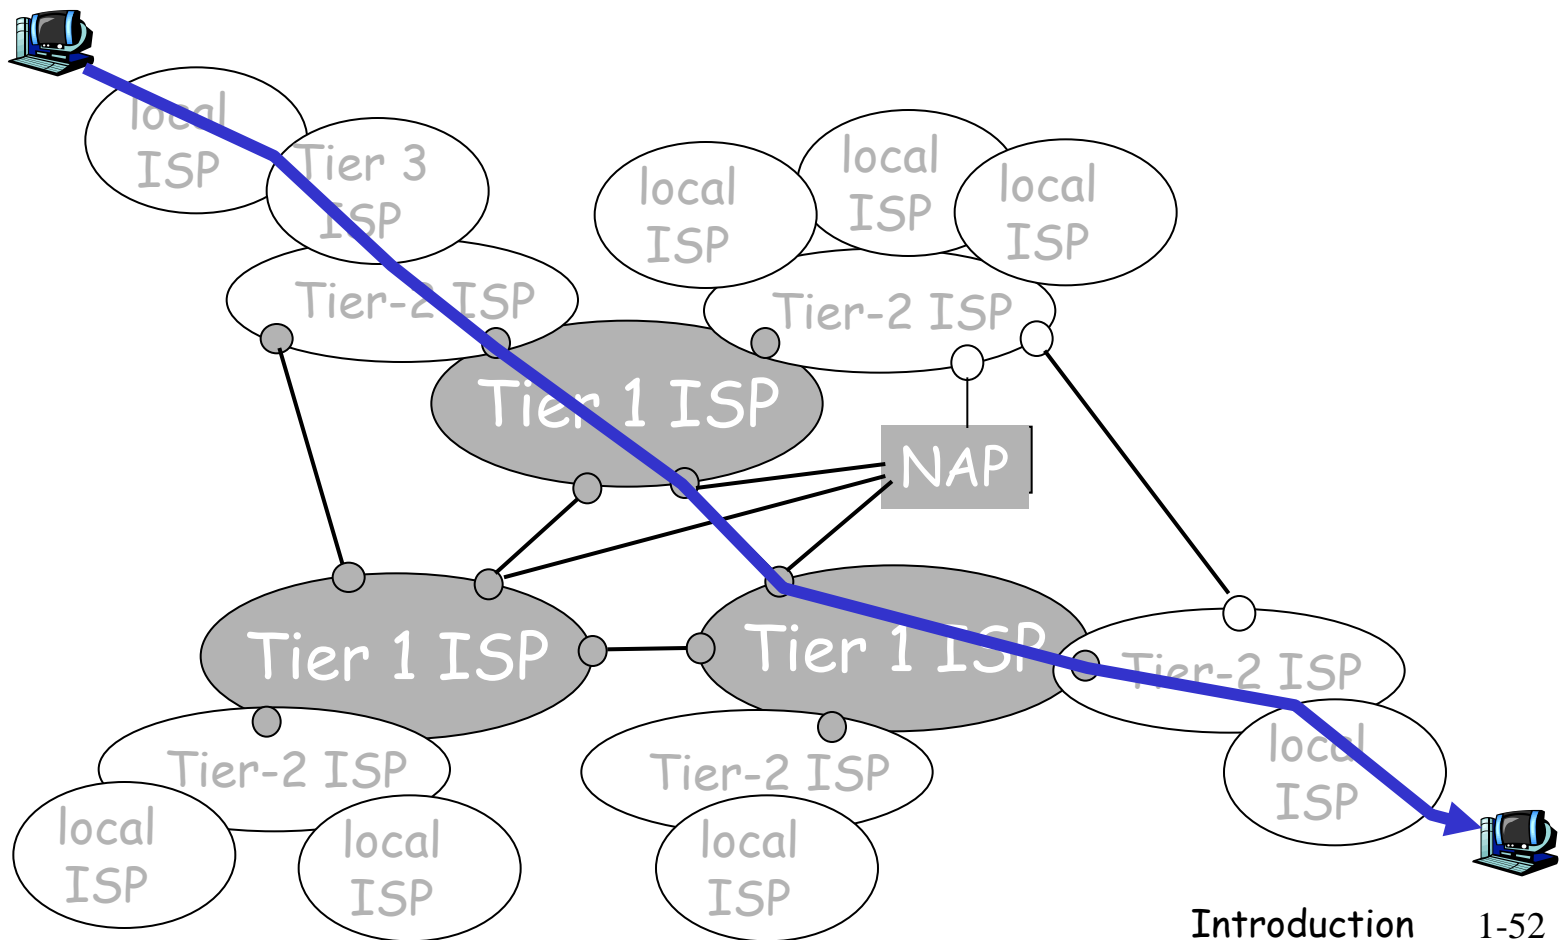

Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

1.3 Network core

1.4 Network access and physical media


1.5 Internet structure and ISPs

1.6 Delay & loss in packet-switched networks

1.7 Protocol layers, service models

1.8 History

Delay in network




- ❑ Takes L/R seconds to transmit (push out) packet of L bits on to link or R bps
- ❑ Entire packet must arrive at router before it can be transmitted on next link: *store and forward*
- ❑ delay = $3L/R$

Example:

- ❑ $L = 7.5$ Mbits
- ❑ $R = 1.5$ Mbps
- ❑ delay = 15 sec

Message Segmenting

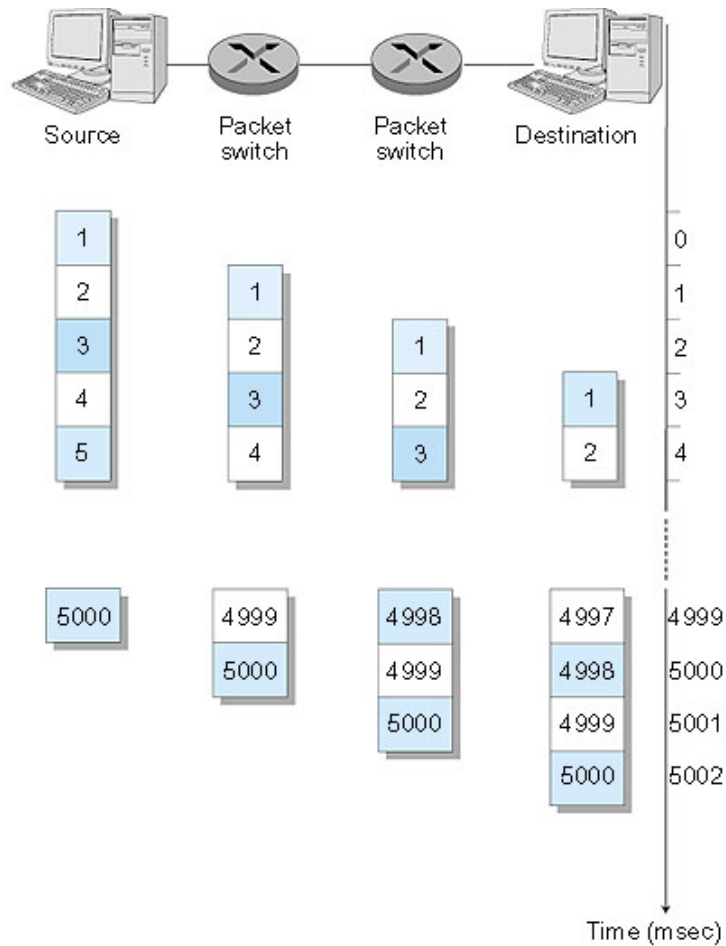


Now break up the message into 5000 packets

- Each packet 1,500 bits
- 1 msec to transmit packet on one link
- *pipelining*: each link works in parallel
- Delay reduced from 15 sec to 5.002 sec

More delays, and loss

packets *queue* in router buffers

- ❑ packet arrival rate to link exceeds output link capacity
- ❑ packets queue, wait for turn
- ❑ Loss: too long a queue - will happen in circuit switching ?

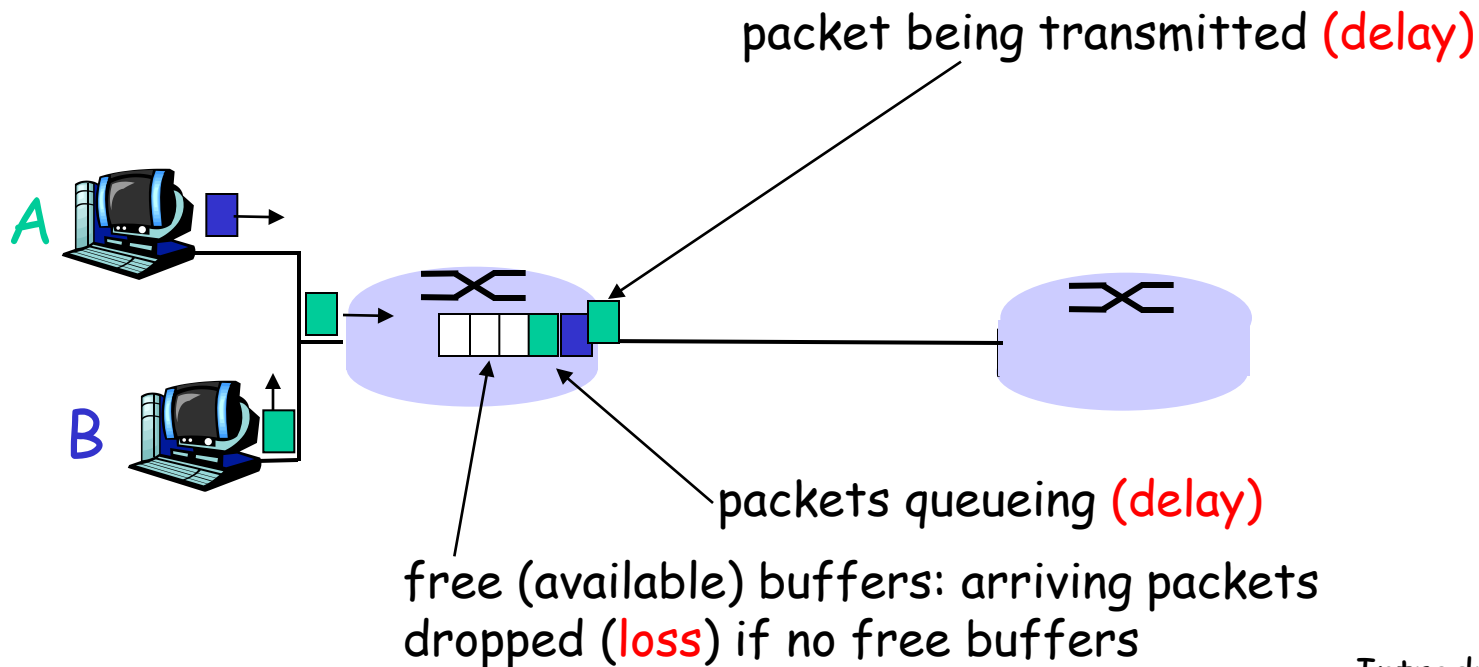


Four sources of packet delay

□ 1. nodal processing:

- m check bit errors
- m determine output link

□ 2. queuing

- m time waiting at output link for transmission
- m depends on congestion level of router

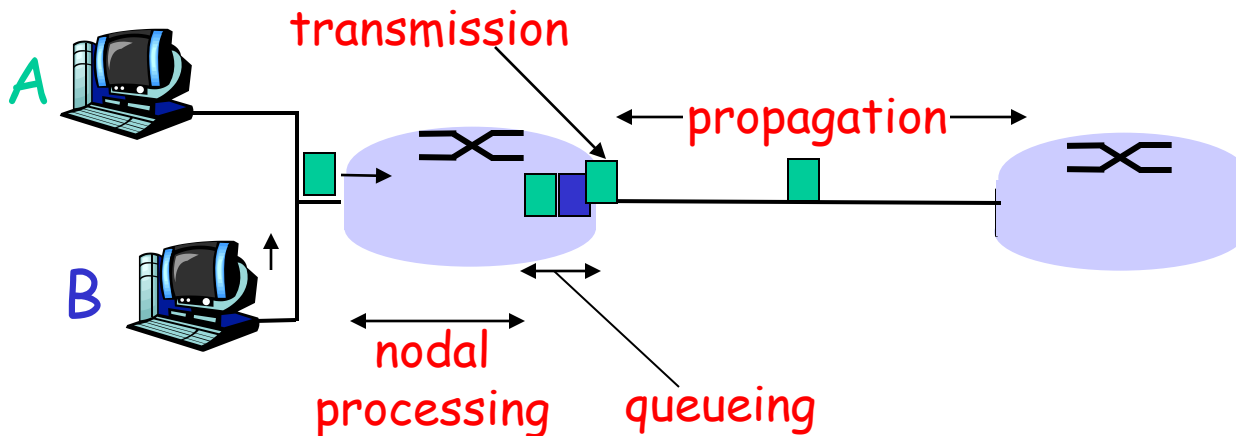

Delay in packet-switched networks


3. Transmission delay:

- ❑ R = link bandwidth (bps)
- ❑ L = packet length (bits)
- ❑ time to send bits into link = L/R


4. Propagation delay:

- ❑ d = length of physical link
- ❑ s = propagation speed in medium ($\sim 2 \times 10^8$ m/sec)
- ❑ propagation delay = d/s

Note: s and R are very different quantities!

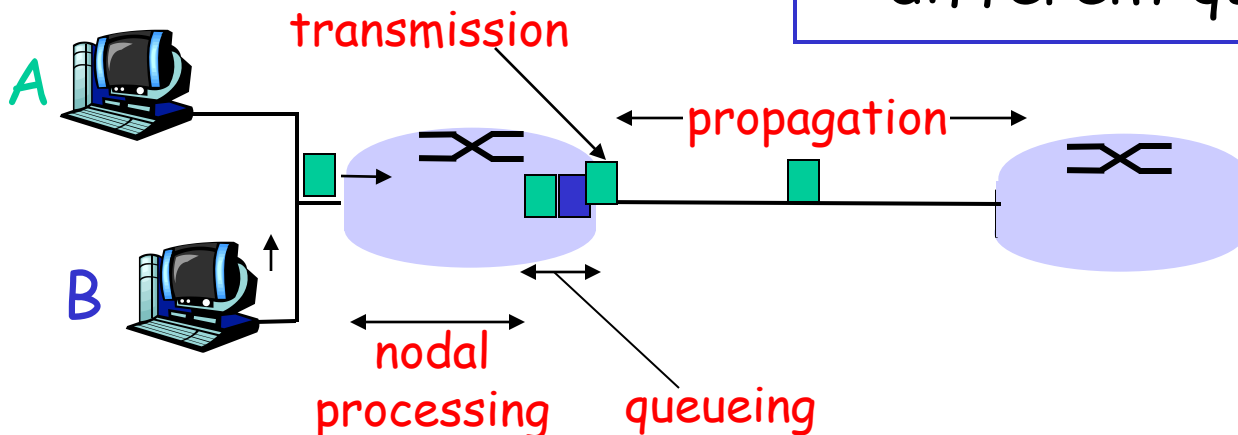


Caravan analogy

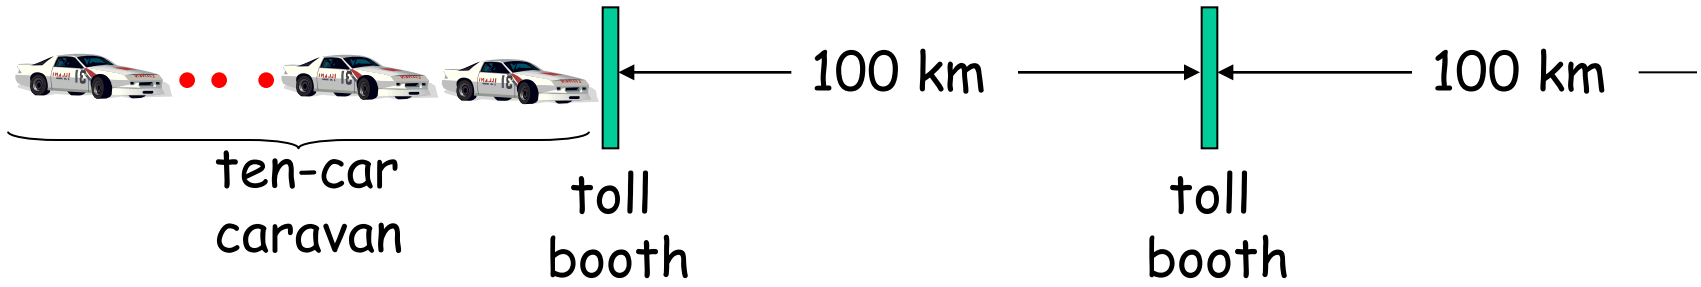


- ❑ Cars "propagate" at 100 km/hr
- ❑ Toll booth takes 12 sec to service a car (transmission time)
- ❑ car~bit; caravan ~ packet
- ❑ Q: How long until caravan is lined up before 2nd toll booth?

Caravan analogy

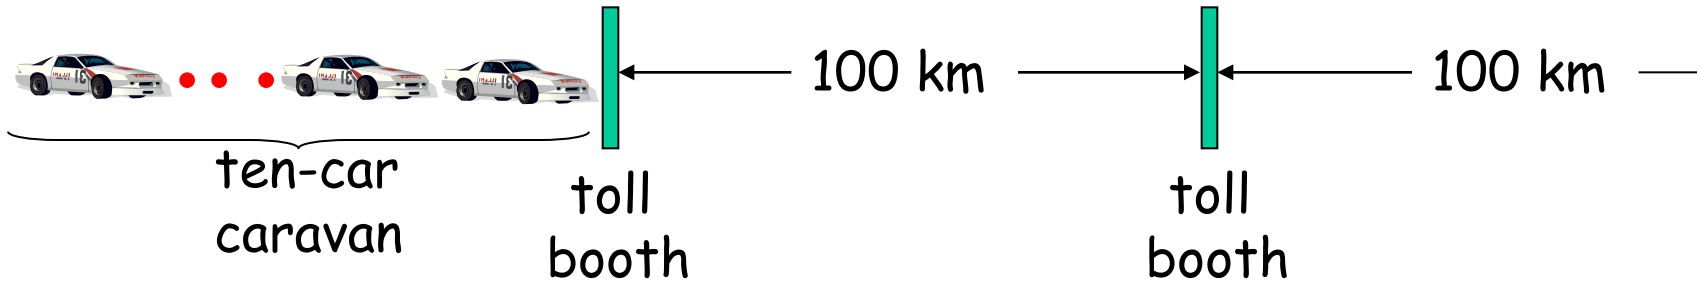

- ❑ Cars “propagate” at 100 km/hr
- ❑ Toll booth takes 12 sec to service a car (transmission time)
- ❑ car~bit; caravan ~ packet
- ❑ Q: How long until caravan is lined up before 2nd toll booth?
- ❑ Time to “push” entire caravan through toll booth onto highway = $12 \times 10 = 120$ sec
- ❑ Time for last car to propagate from 1st to 2nd toll booth: $100\text{km} / (100\text{km/hr}) = 1$ hr
- ❑ A: 62 minutes

Caravan analogy (more)

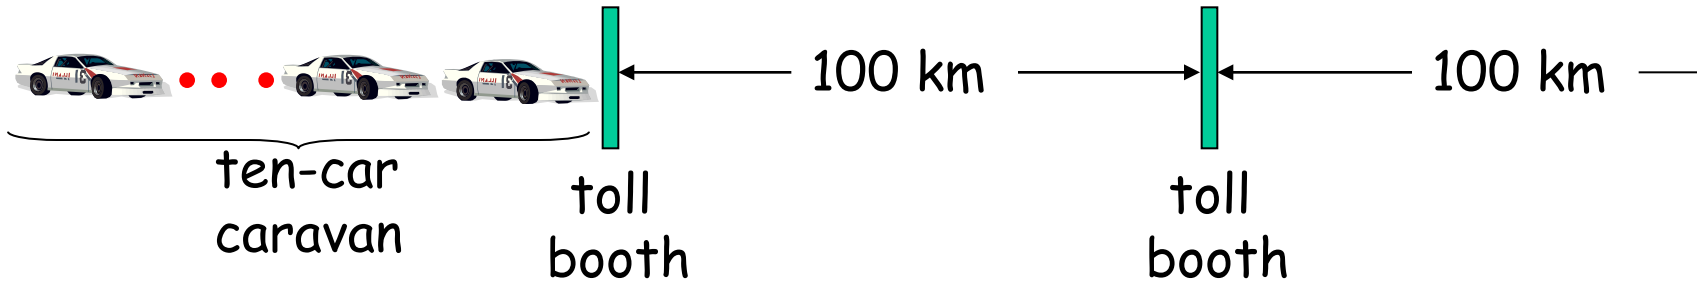

- ❑ Cars now "propagate" at 1000 km/hr
- ❑ Toll booth now takes 1 min to service a car
- ❑ **Q: Will cars arrive to 2nd booth before all cars serviced at 1st booth?**

Nodal delay


$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

- ❑ d_{proc} = processing delay
m typically a few microsecs or less
- ❑ d_{queue} = queuing delay
m depends on congestion
- ❑ d_{trans} = transmission delay
m = L/R , significant for low-speed links
- ❑ d_{prop} = propagation delay
m a few microsecs to hundreds of msecs

Queueing delay (revisited)

- R =link bandwidth (bps)
- L =packet length (bits)
- a =average packet arrival rate


traffic intensity = La/R

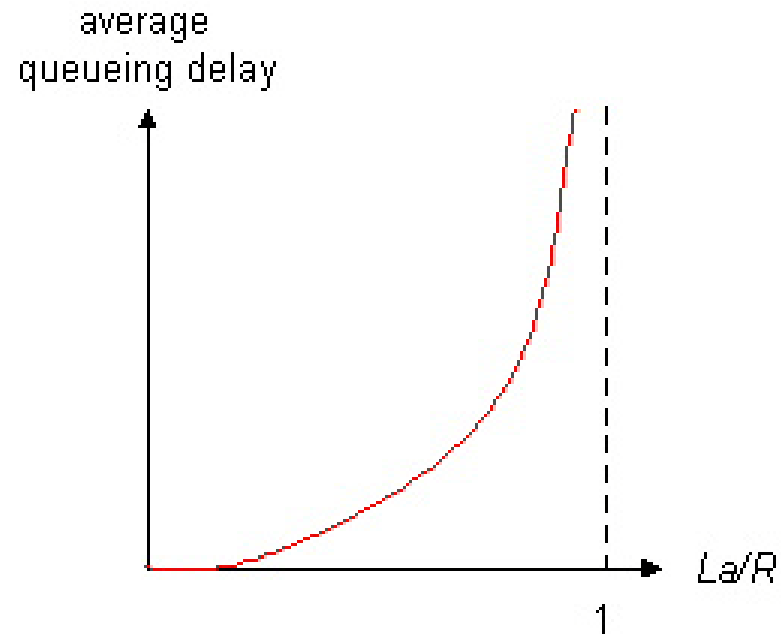

- $La/R \sim 0$: average queueing delay small
- $La/R \rightarrow 1$: delays become large
- $La/R > 1$: more "work" arriving than can be serviced, average delay infinite!

“Real” Internet delays and routes


- ❑ What do “real” Internet delay & loss look like?
- ❑ **Traceroute program:** provides delay measurement from source to router along end-end Internet path towards destination. For all i :
 - m sends three packets that will reach router i on path towards destination
 - m router i will return packets to sender
 - m sender times interval between transmission and reply.

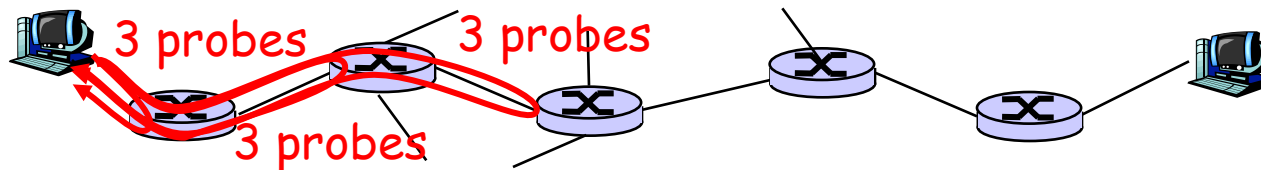

“Real” Internet delays and routes

traceroute: gaia.cs.umass.edu to www.eurecom.fr

Three delay measurements from
gaia.cs.umass.edu to cs-gw.cs.umass.edu



1	cs-gw (128.119.240.254)	1 ms	1 ms	2 ms
2	border1-rt-fa5-1-0.gw.umass.edu (128.119.3.145)	1 ms	1 ms	2 ms
3	cht-vbns.gw.umass.edu (128.119.3.130)	6 ms	5 ms	5 ms
4	jn1-at1-0-0-19.wor.vbns.net (204.147.132.129)	16 ms	11 ms	13 ms
5	jn1-so7-0-0-0.wae.vbns.net (204.147.136.136)	21 ms	18 ms	18 ms
6	abilene-vbns.abilene.ucaid.edu (198.32.11.9)	22 ms	18 ms	22 ms
7	nycm-wash.abilene.ucaid.edu (198.32.8.46)	22 ms	22 ms	22 ms
8	62.40.103.253 (62.40.103.253)	104 ms	109 ms	106 ms
9	de2-1.de1.de.geant.net (62.40.96.129)	109 ms	102 ms	104 ms
10	de.fr1.fr.geant.net (62.40.96.50)	113 ms	121 ms	114 ms
11	renater-gw.fr1.fr.geant.net (62.40.103.54)	112 ms	114 ms	112 ms
12	nio-n2.cssi.renater.fr (193.51.206.13)	111 ms	114 ms	116 ms
13	nice.cssi.renater.fr (195.220.98.102)	123 ms	125 ms	124 ms
14	r3t2-nice.cssi.renater.fr (195.220.98.110)	126 ms	126 ms	124 ms
15	eurecom-valbonne.r3t2.ft.net (193.48.50.54)	135 ms	128 ms	133 ms
16	194.214.211.25 (194.214.211.25)	126 ms	128 ms	126 ms
17	* * *			
18	* * *			
19	fantasia.eurecom.fr (193.55.113.142)	132 ms	128 ms	136 ms

trans-oceanic link

* means no response (probe lost, router not replying)

Packet loss

- ❑ queue (aka buffer) preceding link in buffer has finite capacity
- ❑ when packet arrives to full queue, packet is dropped (aka lost)
- ❑ lost packet may be retransmitted by previous node, by source end system, or not retransmitted at all
- ❑ Any other possibility for loss ?

Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

1.3 Network core

1.4 Network access and physical media

1.5 Internet structure and ISPs

1.6 Delay & loss in packet-switched networks

1.7 Protocol layers, service models

1.8 History

Protocol "Layers"

Networks are complex!


- many "pieces":
 - m hosts
 - m routers
 - m links of various media
 - m applications
 - m protocols
 - m hardware, software

Question:

Is there any hope of
organizing structure of
network?


Or at least our discussion
of network services?

Organization of air travel

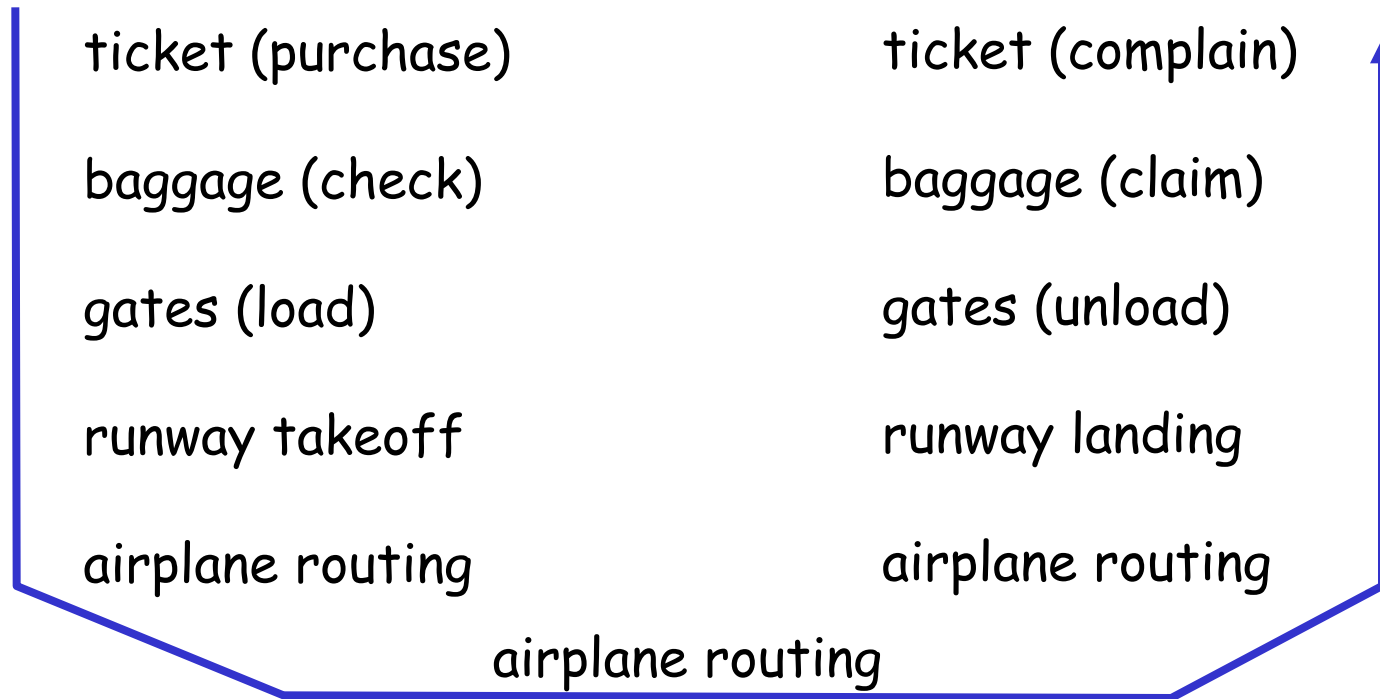


□ a series of steps

Layering of airline functionality

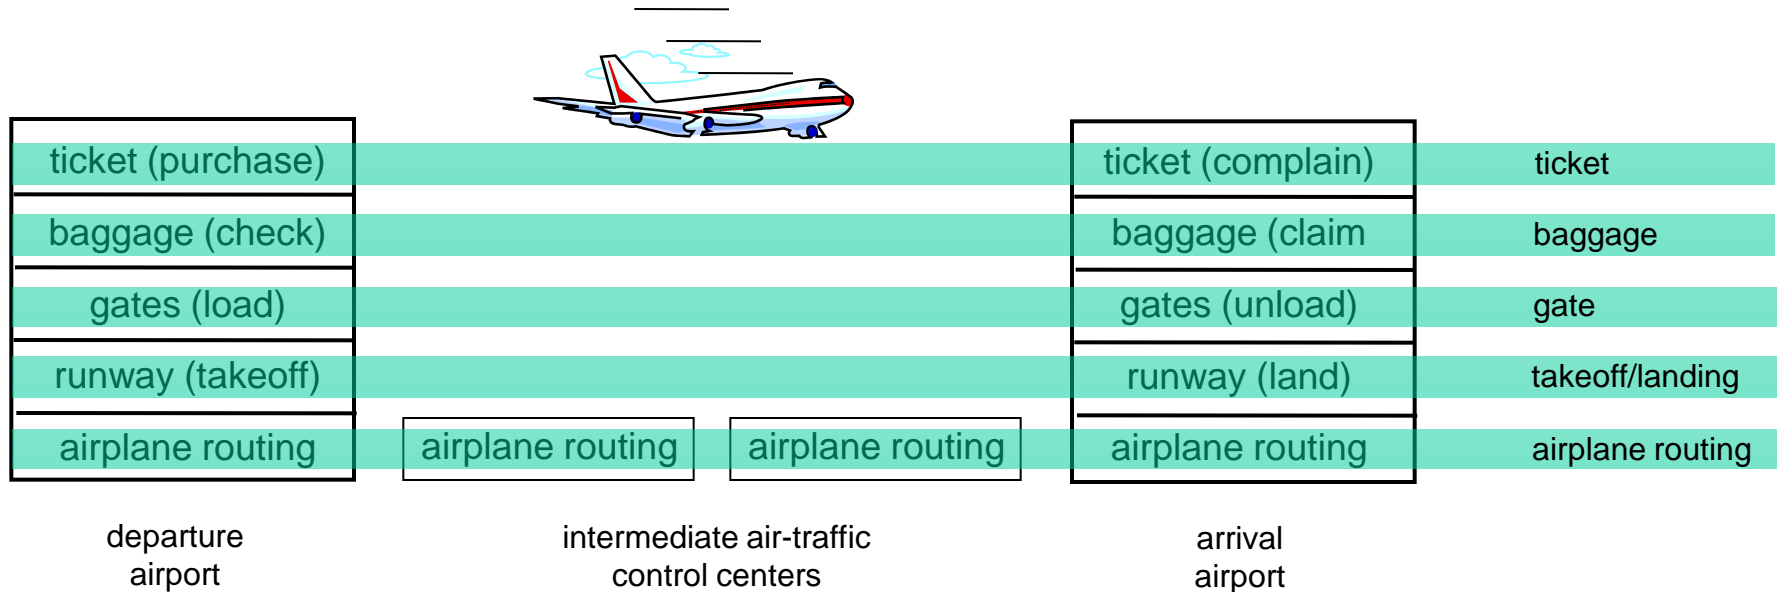

Layers: each layer implements a service
m via its own internal-layer actions
m relying on services provided by layer below

Another example: SFU structure

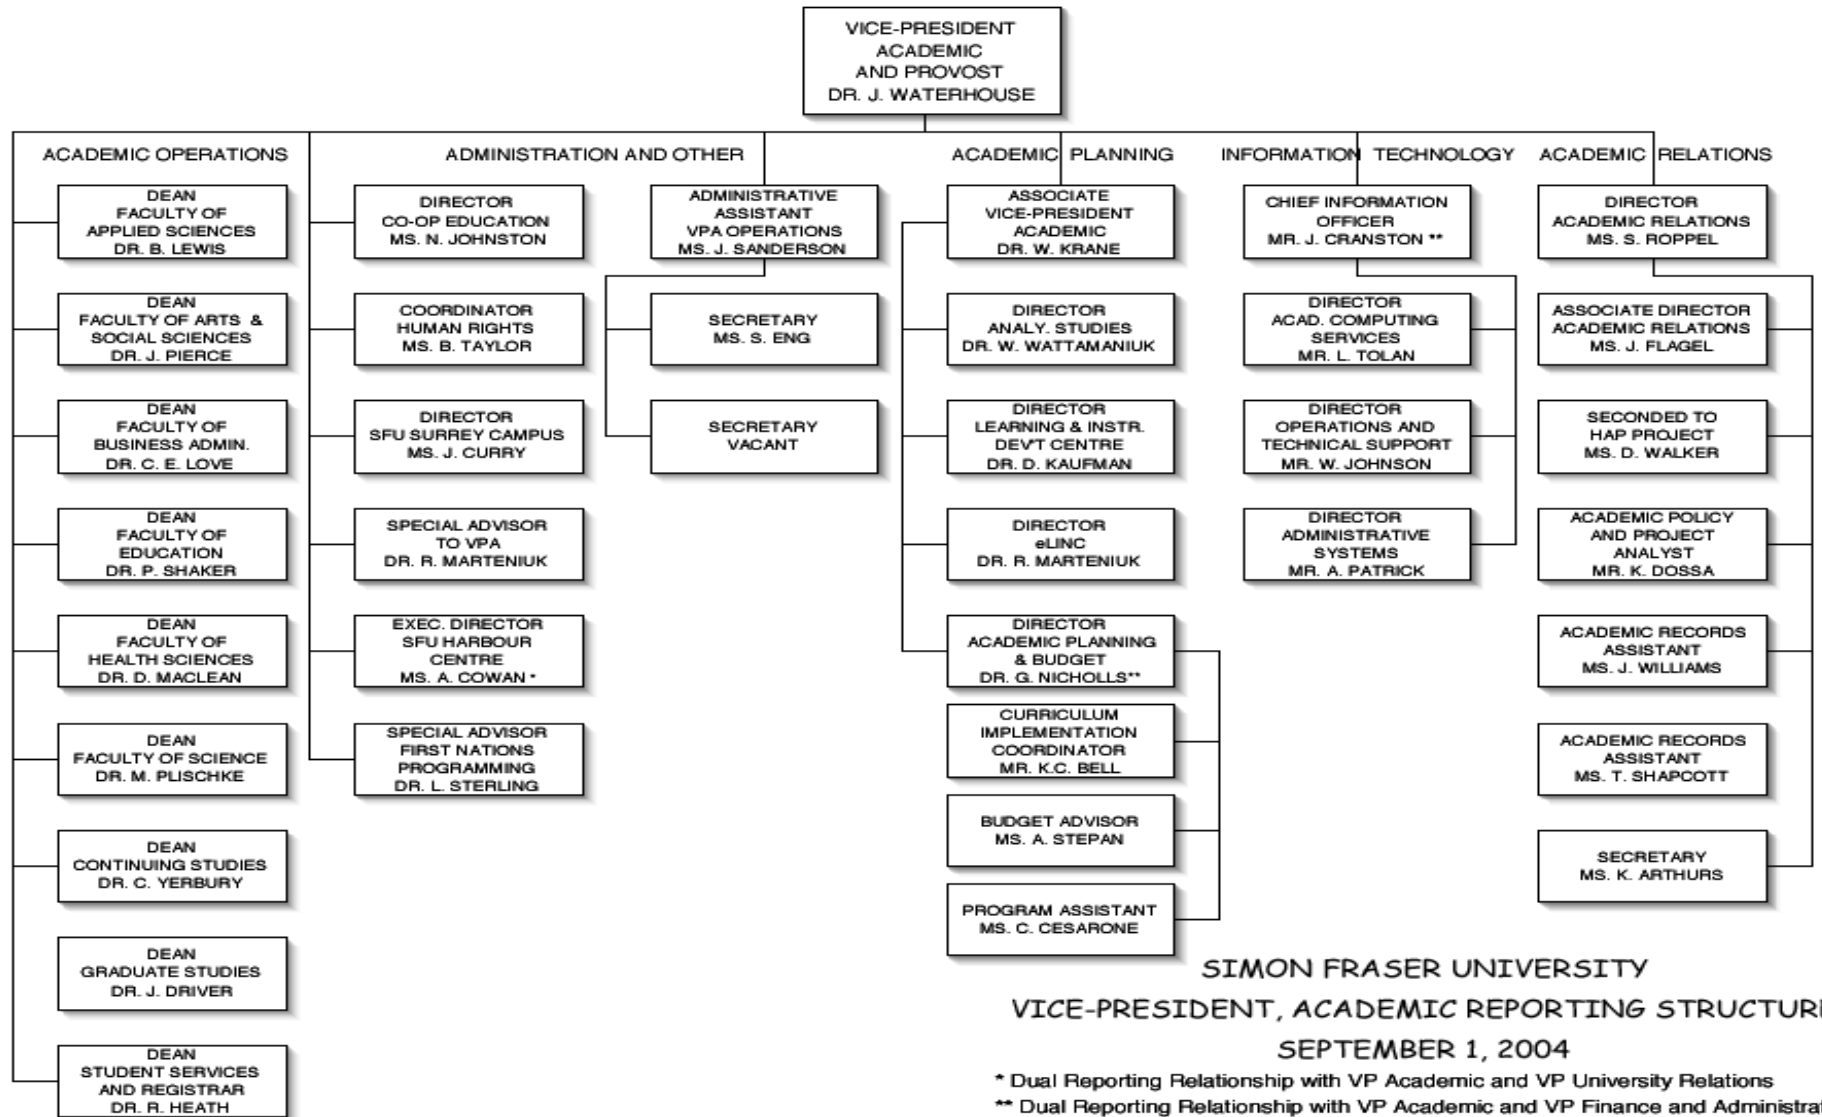


Why layering?

Dealing with complex systems:

- ❑ explicit structure allows identification, relationship of complex system's pieces
 - m layered **reference model** for discussion
- ❑ modularization eases maintenance, updating of system
 - m change of implementation of layer's service transparent to rest of system
 - m e.g., change in gate procedure doesn't affect rest of system
- ❑ layering considered harmful by many people? Why

Internet protocol stack


- **application:** supporting network applications
 - m FTP, SMTP, STTP
- **transport:** host-host data transfer
 - m TCP, UDP
- **network:** routing of datagrams from source to destination
 - m IP, routing protocols
- **link:** data transfer between neighboring network elements
 - m PPP, Ethernet
- **physical:** bits "on the wire"

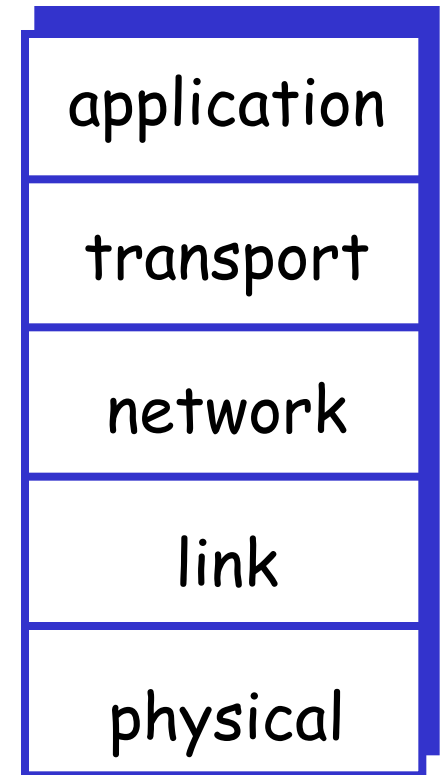

Layering: logical communication

Each layer:


- distributed
- "entities" implement layer functions at each node
- entities perform actions, exchange messages with peers

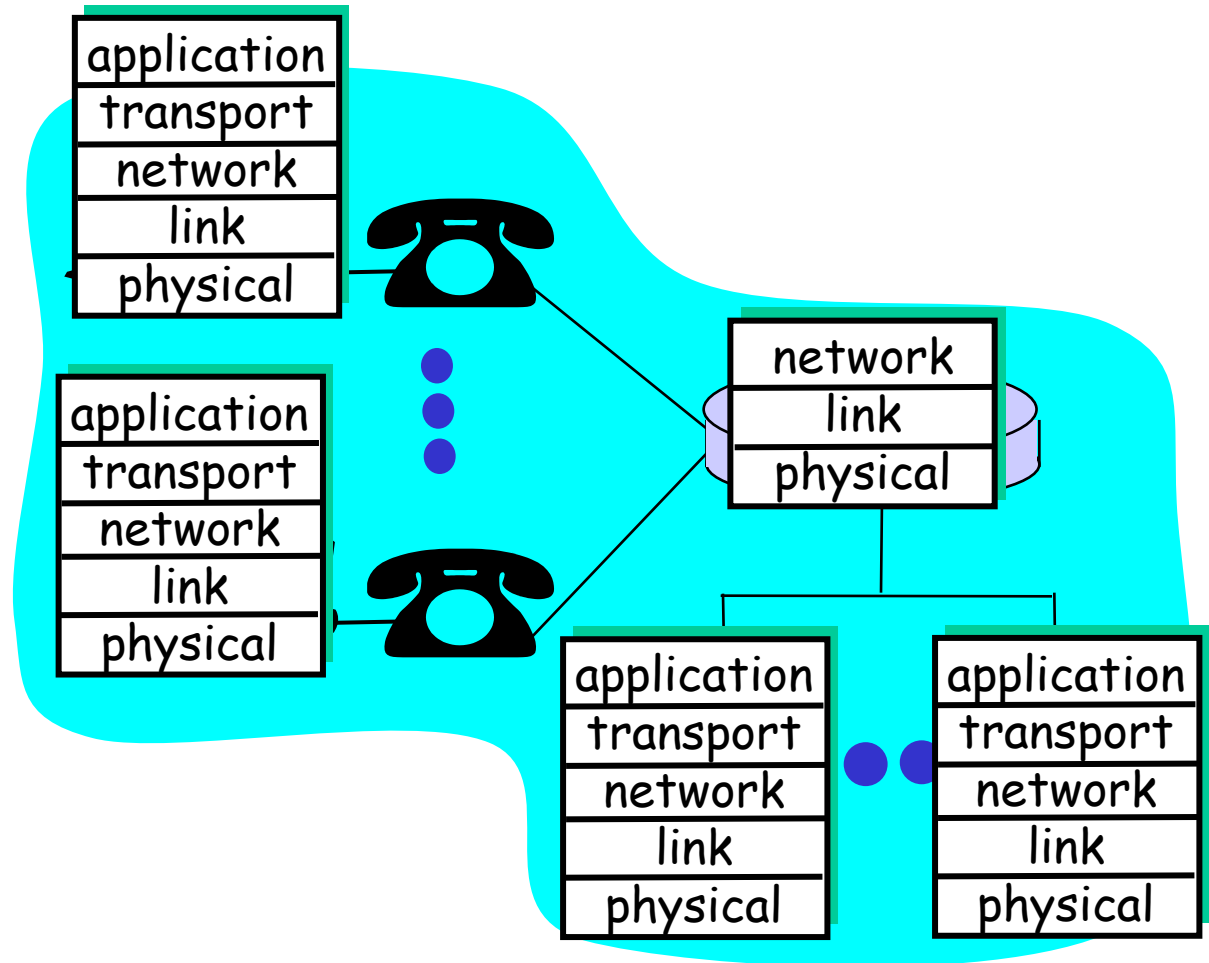


Layering: logical communication

E.g.: transport

- ❑ take data from app
- ❑ add addressing, reliability check info to form "datagram"
- ❑ send datagram to peer
- ❑ wait for peer to ack receipt
- ❑ analogy: post office

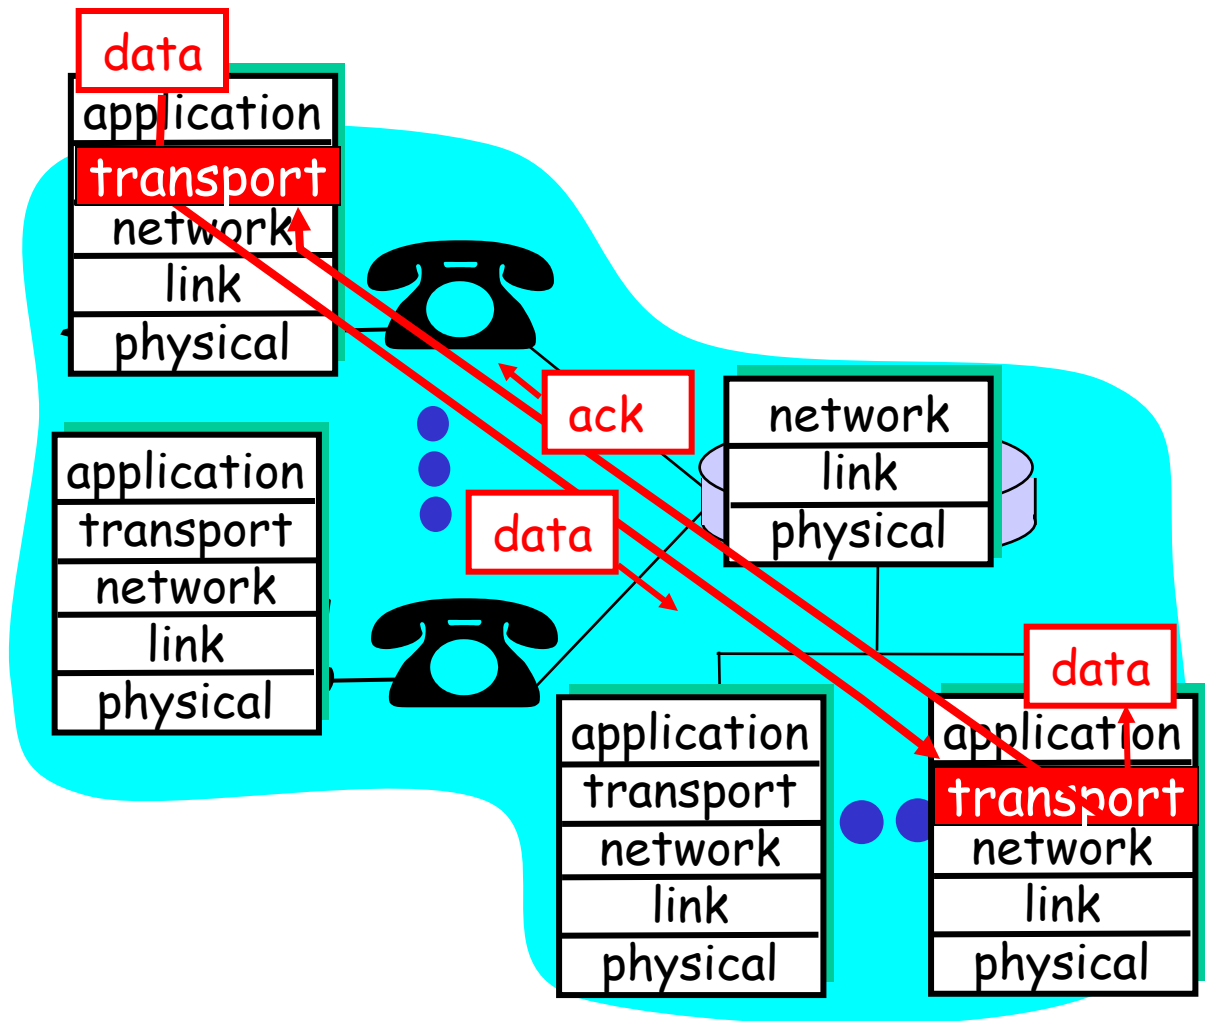


Layering: physical communication

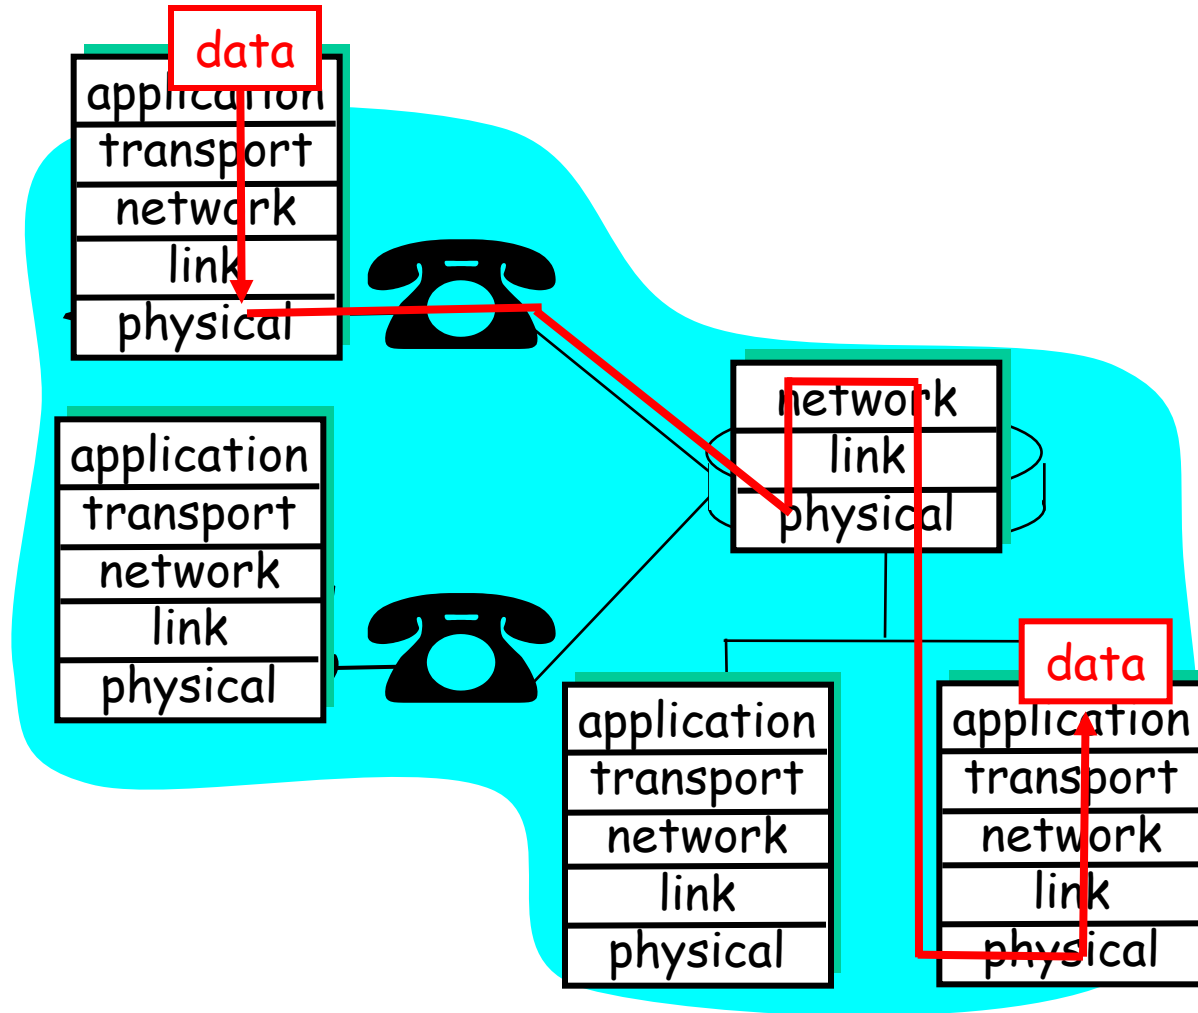


Protocol layering and data

Each layer takes data from above




- adds header information to create new data unit
- passes new data unit to layer below

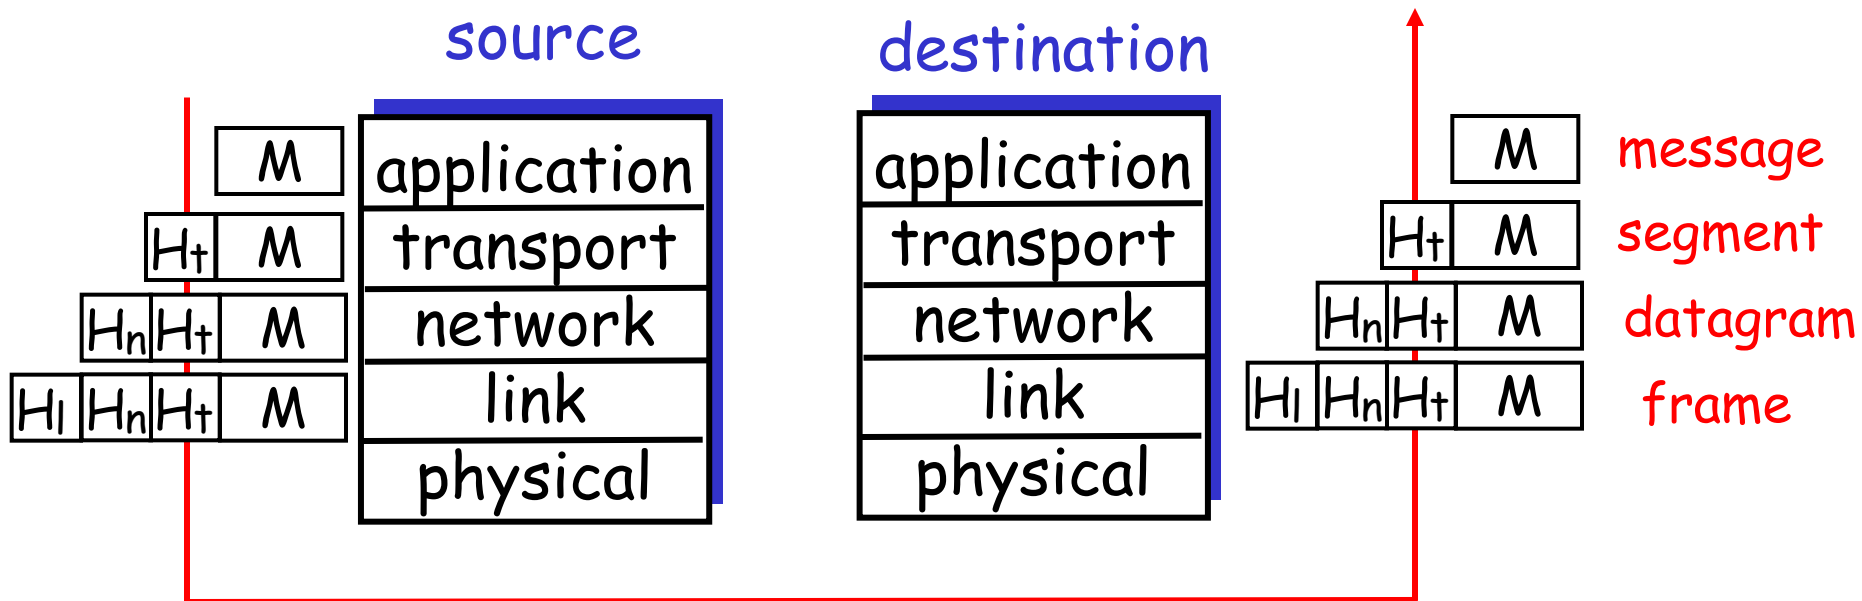

Encapsulation





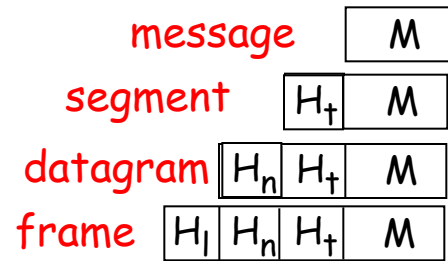


source




switch

destination



router

ISO 7-layer reference model

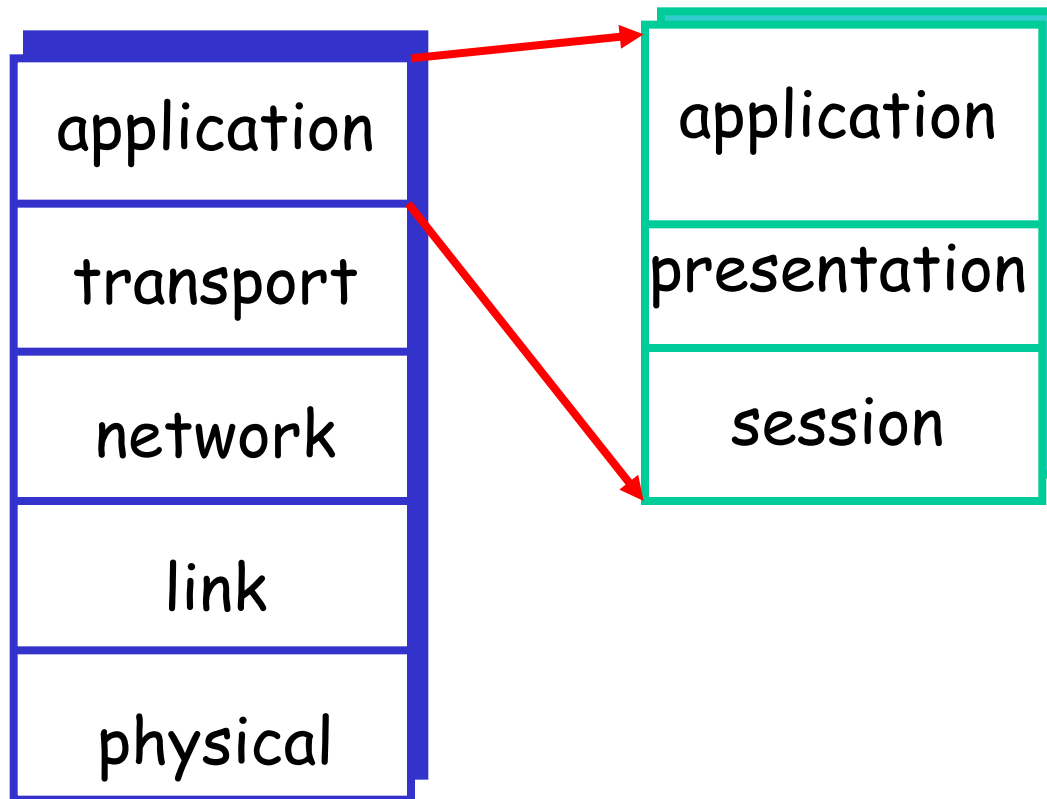

Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

1.3 Network core

1.4 Network access and physical media

1.5 ISPs and Internet backbones

1.6 Delay & loss in packet-switched networks

1.7 Internet structure and ISPs

1.8 History

Internet History

1961-1972: Early packet-switching principles

- 1961: Kleinrock - queueing theory shows effectiveness of packet-switching
- 1964: Baran - packet-switching in military nets
- 1967: ARPAnet conceived by Advanced Research Projects Agency
- 1969: first ARPAnet node operational
- 1972:
 - m ARPAnet demonstrated publicly
 - m NCP (Network Control Protocol) first host-host protocol
 - m first e-mail program
 - m ARPAnet has 15 nodes

Internet History

1972-1980: Internetworking, new and proprietary nets

- ❑ 1970: ALOHAnet satellite network in Hawaii
- ❑ 1973: Metcalfe's PhD thesis proposes Ethernet
- ❑ 1974: Cerf and Kahn - architecture for interconnecting networks
- ❑ late 70's: proprietary architectures: DECnet, SNA, XNA
- ❑ late 70's: switching fixed length packets (ATM precursor)
- ❑ 1979: ARPAnet has 200 nodes

Cerf and Kahn's internetworking principles:

- m minimalism, autonomy - no internal changes required to interconnect networks
- m best effort service model
- m stateless routers
- m decentralized control

**define today's Internet
architecture**

Internet History

1980-1990: new protocols, a proliferation of networks

- ❑ 1983: deployment of TCP/IP
- ❑ 1982: SMTP e-mail protocol defined
- ❑ 1983: DNS defined for name-to-IP-address translation
- ❑ 1985: FTP protocol defined
- ❑ 1988: TCP congestion control
- ❑ new national networks: Cernet, BITnet, NSFnet, Minitel
- ❑ 100,000 hosts connected to confederation of networks

Internet History

1990, 2000's: commercialization, the Web, new apps

- ❑ Early 1990's: ARPAnet decommissioned
- ❑ 1991: NSF lifts restrictions on commercial use of NSFnet (decommissioned, 1995)
- ❑ early 1990s: Web
 - m hypertext [Bush 1945, Nelson 1960's]
 - m HTML, HTTP: Berners-Lee
 - m 1994: Mosaic, later Netscape
 - m late 1990's: commercialization of the Web
- ❑ Late 1990's - 2000's:
 - ❑ more killer apps: instant messaging, peer2peer file sharing (e.g., BitTorrent), video sharing (e.g., YouTube)
 - ❑ network security to forefront
 - ❑ est. 50 million host, 100 million+ users
 - ❑ backbone links running at Gbps

Internet Standardization Process

- ❑ All standards of the Internet are published as **RFC** (**Request for Comments**)
 - m but not all RFCs are Internet Standards !
 - m available: <http://www.ietf.org>
 - m Till this morning: RFC3099
- ❑ A typical (but not the only) way of standardization:
 - m Internet draft
 - m RFC
 - m Proposed standard
 - m Draft standard (requires 2 working implementations)
 - m Internet standard (declared by Internet Architecture Board)

Introduction: Summary

Covered a "ton" of material!

- ❑ Internet overview
- ❑ what's a protocol?
- ❑ network edge, core, access network
 - m packet-switching versus circuit-switching
- ❑ Internet/ISP structure
- ❑ performance: loss, delay
- ❑ layering and service models
- ❑ history

You now have a "big picture":

- ❑ context, overview, "feel" of networking
- ❑ more depth, detail *to follow!*

Practices

- ❑ Log into a Unix machine (or Windows)
- ❑ Read the manual of **ping** and **traceroute**, and try them on a machine
 1. % /bin/ping <machine_name>
 2. % /usr/sbin/traceroute <machine_name>
- ❑ Look at the web sites of the routers you see through traceroute